MONUMENT SIGN 4'6"' X 10' INTERNALLY ILLUMINATED



SPECIFICATIONS FOR FABRICATION AND INSTALLATION:

- ¥ Internally illuminated cabinet built to UL specifications
- ¥ Quantity: one (1)
- ¥ Extruded aluminum construction: (with air vents)
- ¥ Overall length of sign cabinet: 4'-6" / Overall height of sign cabinet: 10.0'
- ¥ Overall height above grade: 9' 0"
- ¥ Total square feet: 45.00 sq.ft.
- ¥ Cabinet depth: 12"
- ¥ Retainer size: 1 1/2"
- ¥ Face type: PLEXIGLASS with first-surface translucent vinyl graphics
- ¥ Mounting method: single pole (4" pole pocket)
- ¥ Illuminated with high output fluorescent lamps / ballasts (12" centers)
- ¥ Primary electrical requirement:

120 volt (installed within six feet of sign by others)

Timer or photo-cell (installed by others)

OTHER COMPONENTS / SPECIAL CONSTRUCTION CONSIDERATIONS TOP PORTION ROUTED FACE BACKED WITH WHITE PLEX: COLOR SPECIFICATIONS:

¥ Cabinet painted with two-stage automotive acrylic ¥ Cabinet Color: IVORY MATCH CENTER COLORS ¥ Interior painted for increased illumination: white ¥ Face colors: GOLD MATCH CENTER COLORS ¥ Face graphics: LOW TACKED OPAQUED BG

McCorkle sign co. inc.

1107 EAST GEER STREET DURHAM, NC 27701 FAMILY OWNED & OPERATED SINCE 1971

PHONE (919) 687 - 7080 FAX (919) 687 - 4996

Website: mccorklesigns.com
Email: mccorklesignman@aol.com

U/L # E128872 N.C. ELEC. #20030 SP-ES

Client Name:

CREEDMOOR CROSSING

Location:

4700 CREEDMOOR RD RALEIGH, NC

Start Date: 11/24/2010

Last Revision: 01/21/2011

Job#: 10991

Drawing#: 00000a.vl.sl / el

Page: 1 of 1

Sales Rep:


Adam McCorkle Designer:

Adam McCorkle





MONUMENT SIGN 4'6" X 10' INTERNALLY ILLUMINATED

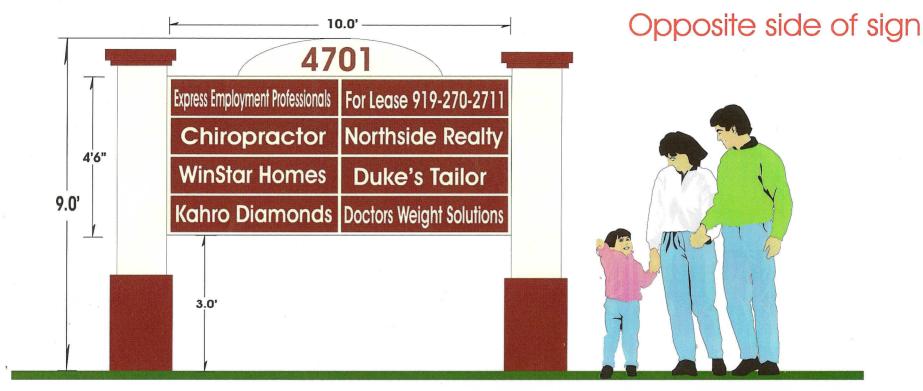

SPECIFICATIONS FOR FABRICATION AND INSTALLATION:

- ¥ Internally illuminated cabinet built to UL specifications
- ¥ Quantity: one (1)
- ¥ Extruded aluminum construction: (with air vents)
- ¥ Overall length of sign cabinet: 4' 6" / Overall height of sign cabinet: 10.0'
- ¥ Overall height above grade: 9' 0"
- ¥ Total square feet: 45.00 sq.ft.
- ¥ Cabinet depth: 12"
- ¥ Retainer size: 1 1/2"
- ¥ Face type: PLEXIGLASS with first-surface translucent vinyl graphics
- ¥ Mounting method: single pole (4" pole pocket)
- ¥ Illuminated with high output fluorescent lamps / ballasts (12" centers)
- ¥ Primary electrical requirement:

120 volt (installed within six feet of sign by others)
Timer or photo-cell (installed by others)

OTHER COMPONENTS / SPECIAL CONSTRUCTION CONSIDERATIONS TOP PORTION ROUTED FACE BACKED WITH WHITE PLEX: COLOR SPECIFICATIONS:

¥ Cabinet painted with two-stage automotive acrylic ¥ Cabinet Color: IVORY MATCH CENTER COLORS ¥ Interior painted for increased illumination: white ¥ Face colors: GOLD MATCH CENTER COLORS ¥ Face graphics: LOW TACKED OPAQUED BG

McCorkle sign co. inc.

1107 EAST GEER STREET DURHAM, NC 27701 FAMILY OWNED & OPERATED SINCE 1971

PHONE (919)687-7080 FAX (919)687-4996

Website: mccorklesigns.com
Email: mccorklesignman@aol.com

U/L # E128872 N.C. ELEC. #20030 SP-ES

Client Name:

CREEDMOOR CROSSING

Location:

4700 CREEDMOOR RD RALEIGH, NC

Start Date: 11/24/2010

Last Revision: 01/21/2011

Job#: 10991

Drawing#: 00000a.vl.sl/el

Page: 1 of 1

Sales Rep:

Adam McCorkle

Designer:
Adam McCorkle



