


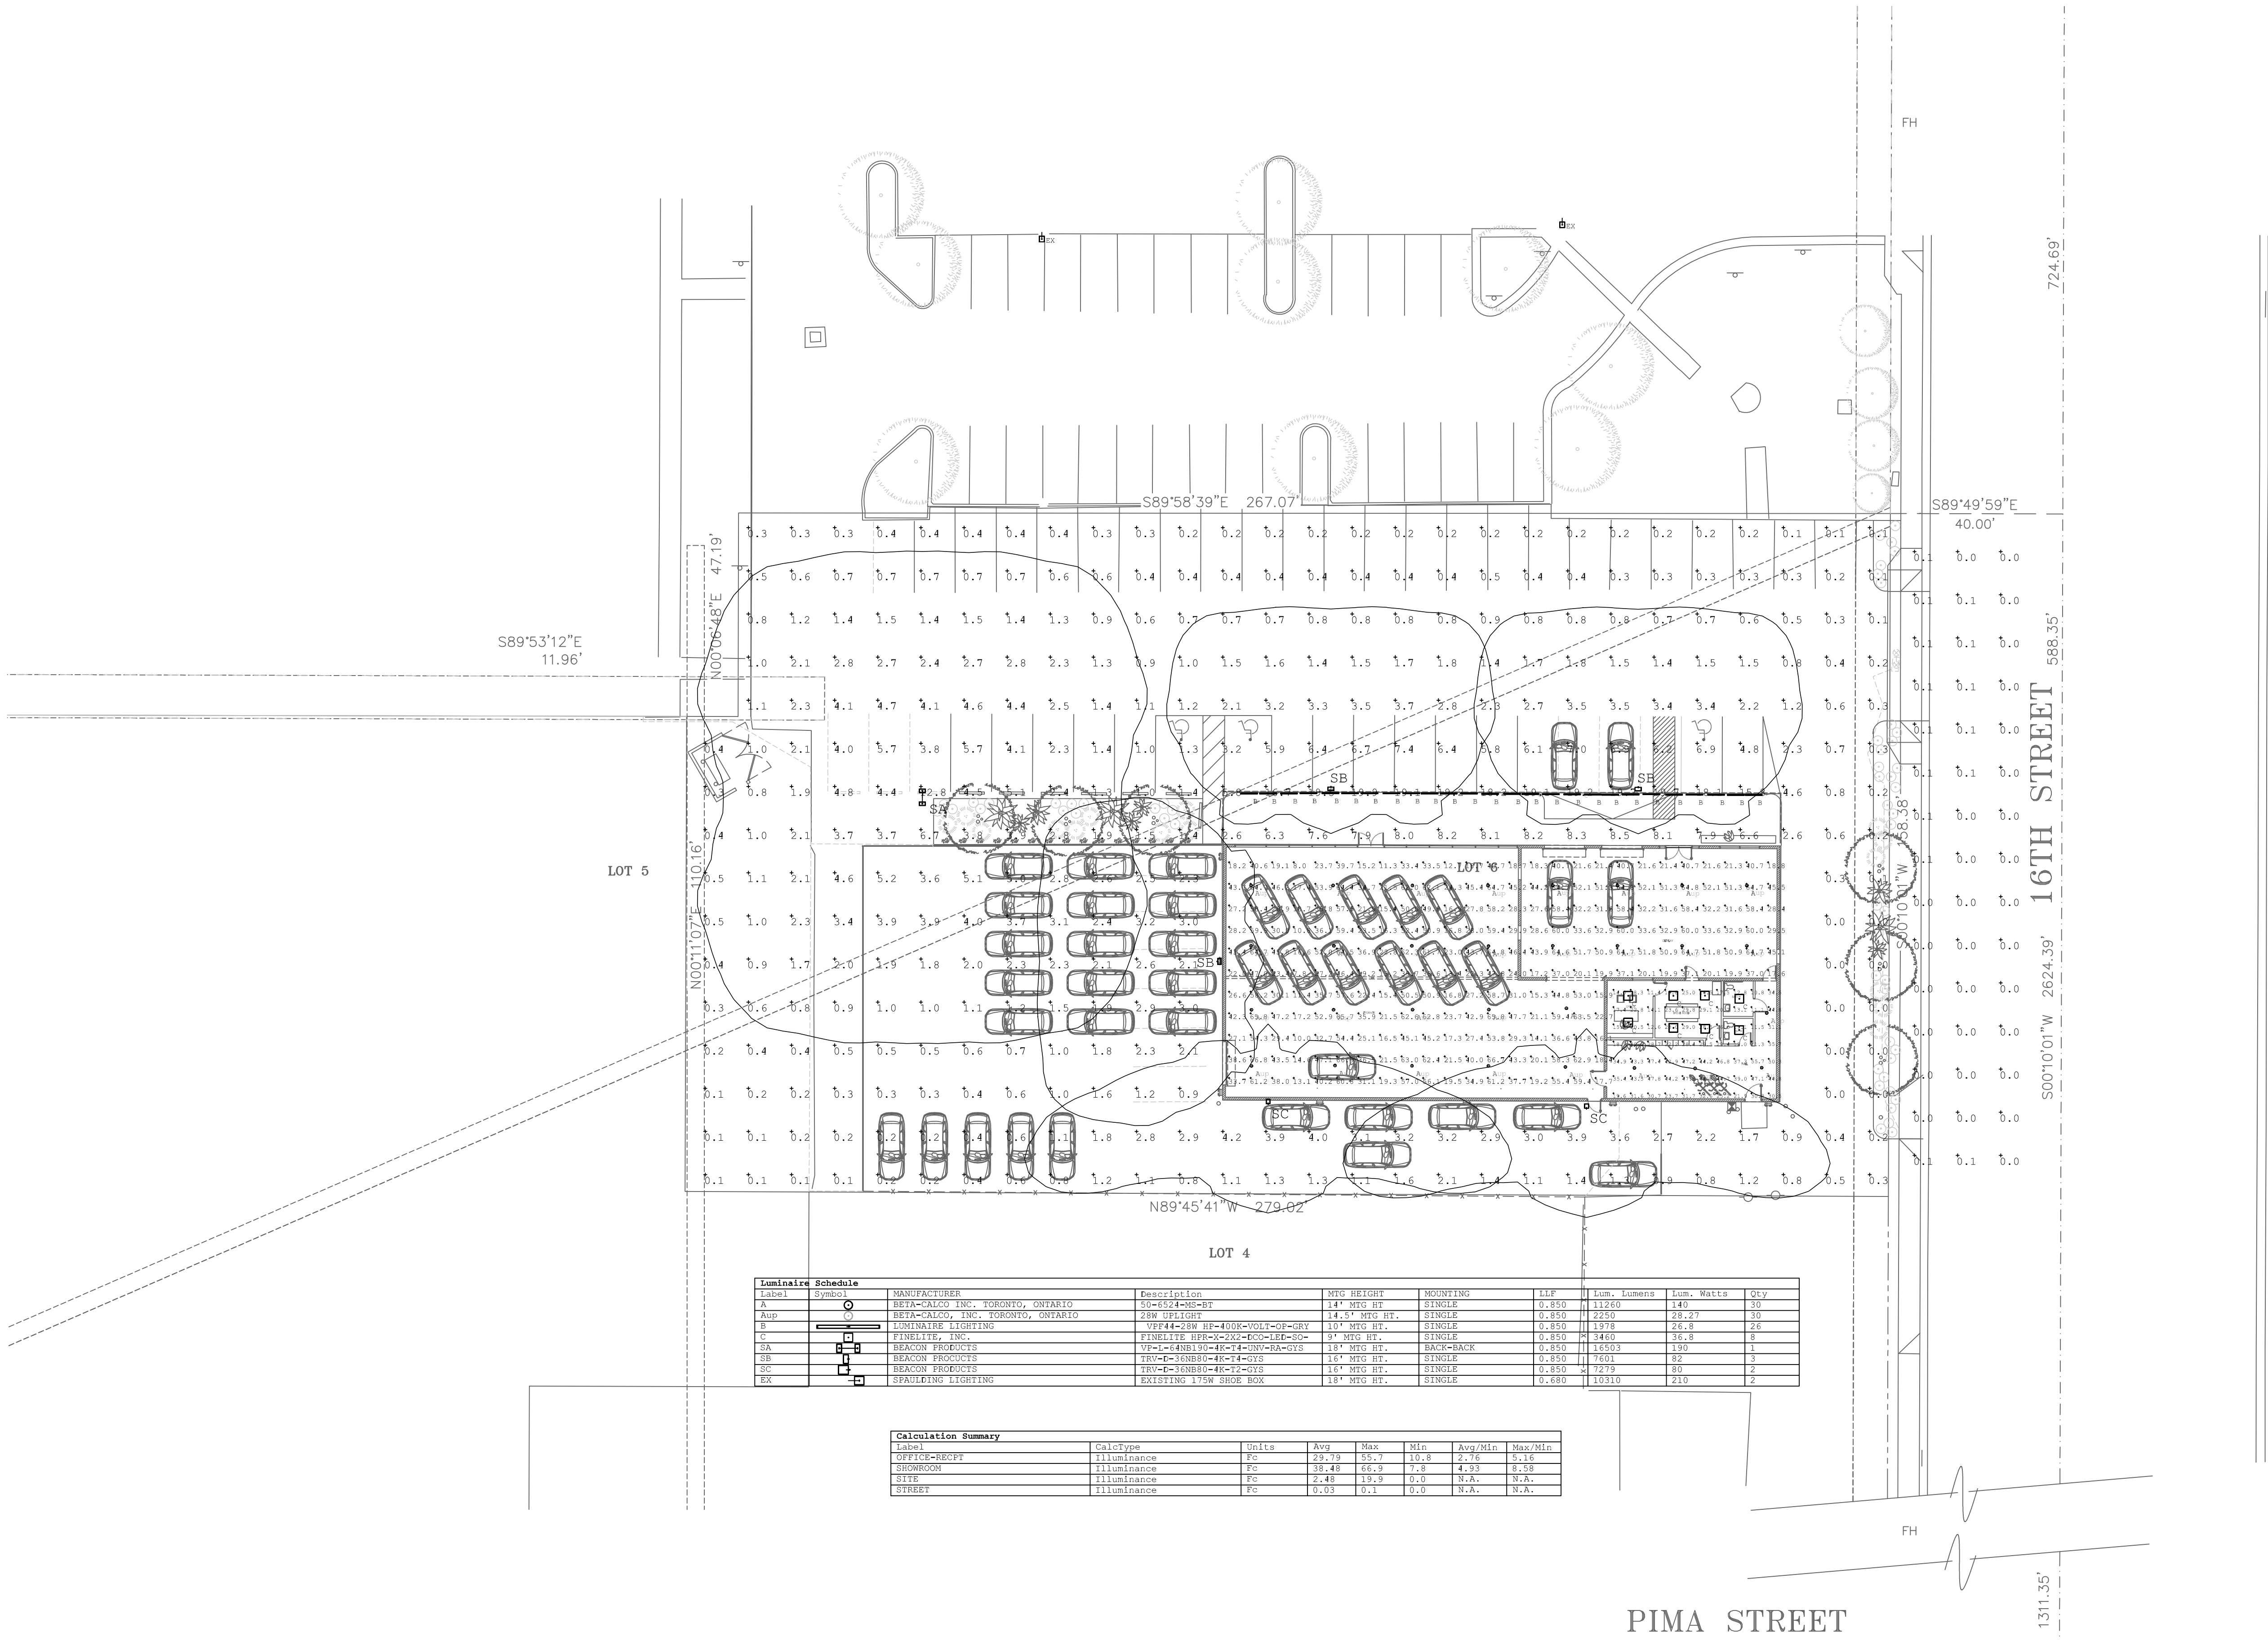


Luminaire Schedule									
Label	Symbol	MANUFACTURER	Description	MTG HEIGHT	MOUNTING	LLF	Lum. Lumens	Lum. Watts	Qty
A	○	BETA-CALCO INC. TORONTO, ONTARIO	50-6524-MS-BT	14' MTG HT.	SINGLE	0.850	11260	140	30
Aup	○	BETA-CALCO INC. TORONTO, ONTARIO	25W UP-LIGHT	14.5' MTG HT.	SINGLE	0.850	2250	28.27	30
B	—	LUMINAIRE LIGHTING	VFF14-25W RF-400K-VOLT-DE=GRY	10' MTG HT.	SINGLE	0.850	1978	26.8	26
C	□	FINELITE, INC.	FINELITE HFR-2-2X2-ECO-LED=50-	9' MTG HT.	SINGLE	0.850	3460	36.8	8
SA	□	BEACON PRODUCTS	TRV-P-36N850-4K-T4-GYS	18' MTG HT.	BACK-BACK	0.850	11603	190	1
SB	□	BEACON PRODUCTS	TRV-P-36N850-4K-T4-GYS	16' MTG HT.	SINGLE	0.850	7601	82	3
SC	□	BEACON PRODUCTS	TRV-P-36N850-4K-T2-GYS	18' MTG HT.	SINGLE	0.850	7279	80	2
EX	□	EXISTING LIGHTING	EXISTING 175W SIRE BOX	18' MTG HT.	SINGLE	0.680	10310	210	2

Calculation Summary							
Taskset	CalcType	Units	Avg	Max	Min	Avg/Min	Max/Min
OFFICE-RECEP	Illuminance	Fc	29.79	55.7	10.8	2.76	5.16
SHOWROOM	Illuminance	Fc	36.48	66.9	7.8	4.53	8.58
SITE	Illuminance	Fc	2.46	19.9	0.0	N.A.	N.A.
STREET	Illuminance	Fc	0.03	0.1	0.0	N.A.	N.A.


ELECTRICAL SITE PLAN PHOTOMETRICS

1" = 20'-0"

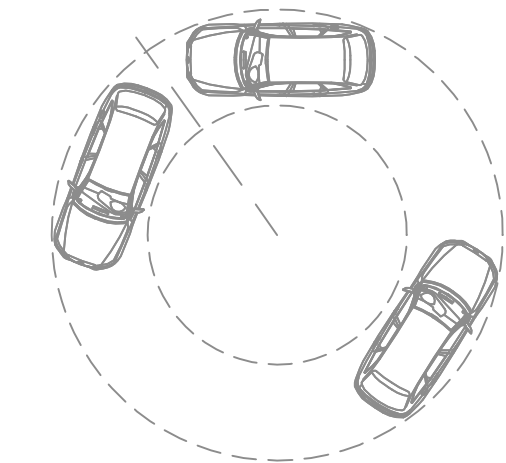


18.8'
AUDI A4 TURNING RADIUS

SELF CERTIFIED BY:
W. BRENT ARMSTRONG
07 July 2014
Plants were prepared, under the direct supervision of, or reviewed by the Self Certified Professional, by the Self Certified Professional, Plants are complete, The plans are, as of the date of submission, in accordance with the requirements of the Phoenix Building Construction Code, and all other applicable laws.


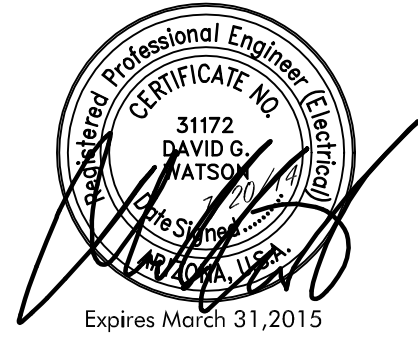


KIVA# 06-5236A8
SDEV#
LPR_#
QS#

- 1 GENERAL**
- 01.0 FINISHED FLOOR- CONC. SLAB ON GRADE
- 01.1 AUDI A4 OUTSIDE TURNING RADIUS: 18.8'
- 01.2 TWO-POINT TURN CLEARANCE SHOWN FOR BACKING INTO OTHER QUEUE AISLES
- 01.3 SIGNS UNDER SEPARATE PERMIT
- 2 SITE WORK**
- 02.0 TOP OF ASPHALT
- 02.1 LANDSCAPING- SEE SITE PLAN
- 02.2 FENCING AND GATES- SEE SITE PLAN
- 3 CONCRETE**
- 03.0 EXISTING CONCRETE SLAB AND FOOTING
- 03.2 NEW CONCRETE CURB
- 03.3 NEW ACCESSIBLE RAMP
- 4 MASONRY**
- 04.0 EXISTING MASONRY- VERIFY CONDITION- REPLACE AND RE-POINT AS REQUIRED
- 04.1 NEW MASONRY TO MATCH AT JAMBS AND EXISTING HOLES
- 5 METALS**
- 05.0 NEW BIKE RACKS
- 05.1 EXISTING METAL CLAD SIDING TO REMAIN
- 05.2 EXISTING METAL DOWNSPOUTS TO REMAIN- REPAIR AS NEEDED
- 05.3 METAL FLASHING TYPICAL-VERIFY CONDITION AND REPLACE AS NEEDED
- 6 WOODS AND PLASTICS**
- 06.0 NEW WOOD FRAMING
- 06.1 EXISTING WOOD TRUSSES
- 06.2 NEW WOOD TRUSSES
- 7 THERMAL & MOISTURE**
- 07.0 NEW FOAM ROOFING SYSTEM- 1" DEEP- ROOF- TEK ACRY-TEK 4200 FE348-2.7 SERIES- ASTM E84
- 07.1 NEW BATT INSULATION- R38- 12" DEEP- UNFACED- ASTM C665 TYPE I AND ASTM E136
- 8 DOORS AND WINDOWS**
- 08.0 WINDOWS AND DOORS- ANODIZED ALUMINUM- EXISTING TO REMAIN- CLEAN AND FIX AS NEEDED- OPTION TO REPLACE AS NEEDED
- 08.1 NEW ROLL-UP DOOR- ANODIZED ALUMINUM- OPTION TO ADD GLASS WINDOWS
- 08.4 NEW METAL ROLL-UP DOOR- OPTION FOR ELECTRIC OPENER W KEYPAD AND BUTTON
- 08.5 EXISTING STOREFRONT TO REMAIN, CLEAN, REPAIR AND CAULK AS REQUIRED.
- 9 FINISHES**
- 09.0 NEW GYPBOARD-LEVEL 5 PAINT GRADE
- 09.1 NEW INTERIOR PAINT
- 09.2 NEW EXTERIOR PAINT
- 09.3 NEW EPOXY FLOOR PAINT OR SEALER THROUGHOUT OVER EXISTING CONCRETE FLOOR -COORDINATE ALL COLORS W/ CHRISTOPH KAISER LLC
- 10 EQUIPMENT**
- 10.1 NEW REFRIGERATOR, MICROWAVE AND COFFEE MACHINE BY OTHERS
- 10.2 WATER COOLER
- 11 FURNISH & FINISH**
- 11.1 NEW REFRIGERATOR, MICROWAVE AND COFFEE MACHINE BY OTHERS
- 11.2 WATER COOLER
- 12.0 NEW MILLWORK OPTION BY OWNER
- 12.1 NEW LOCKERS- OPTION BY OWNER
- 13 MECHANICAL**
- 13.0 NEW HVAC SYSTEM ABOVE
- 13.1 NEW EVAP. COOLING SYSTEM
- 13.2 NEW UNISEX BATHROOM
- 13.4 ABANDON FLOOR TRAP- SEE P1 NOTE 20
- 14 ELECTRICAL**
- 14.1 SERVICE ENTRANCE
- 14.2 PROPOSED FIRE RISER LOCATION- FINAL LOCATION TBD BY SPRINKLER CONTRACTOR- VERIFY EXISTING TAP LOCATIONS

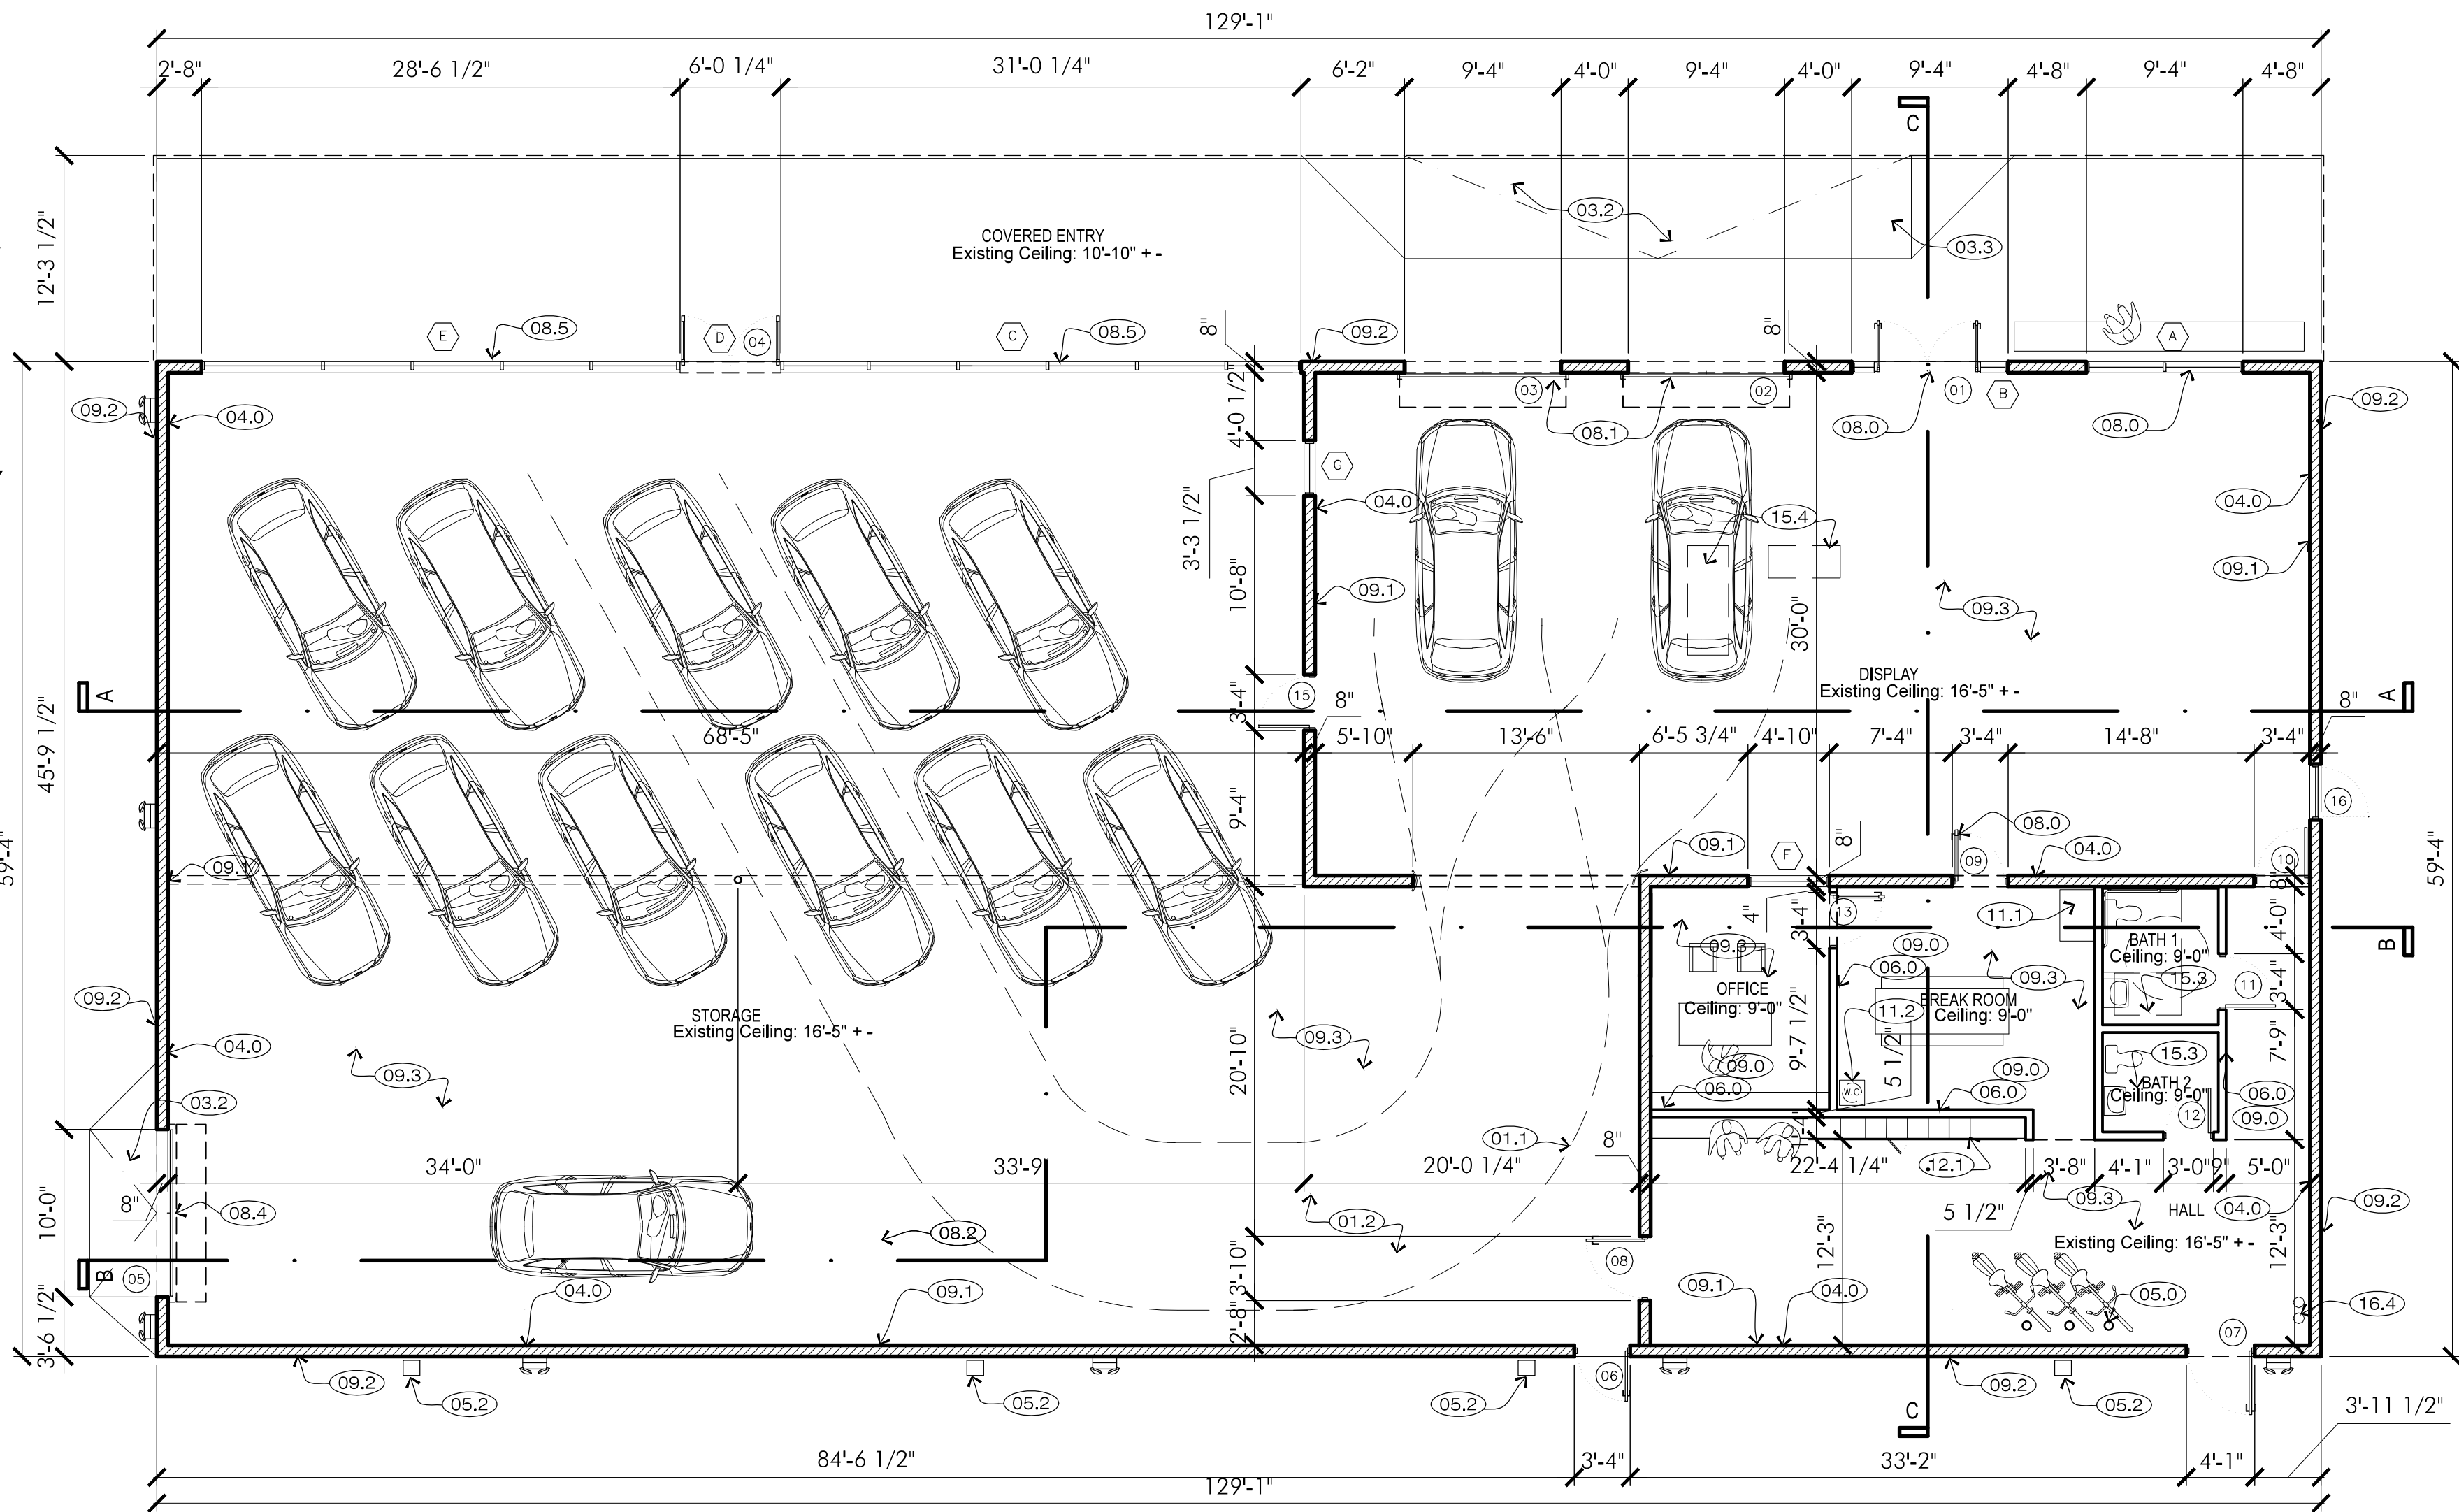

FLOOR PLAN NOTES:
1. Paint top of shelf over office, breakroom, and bathroom with sign "Not Designed for Storage"

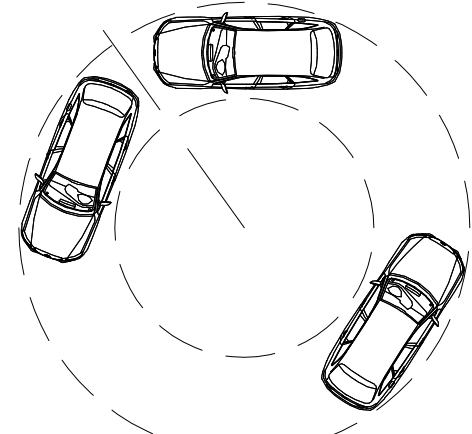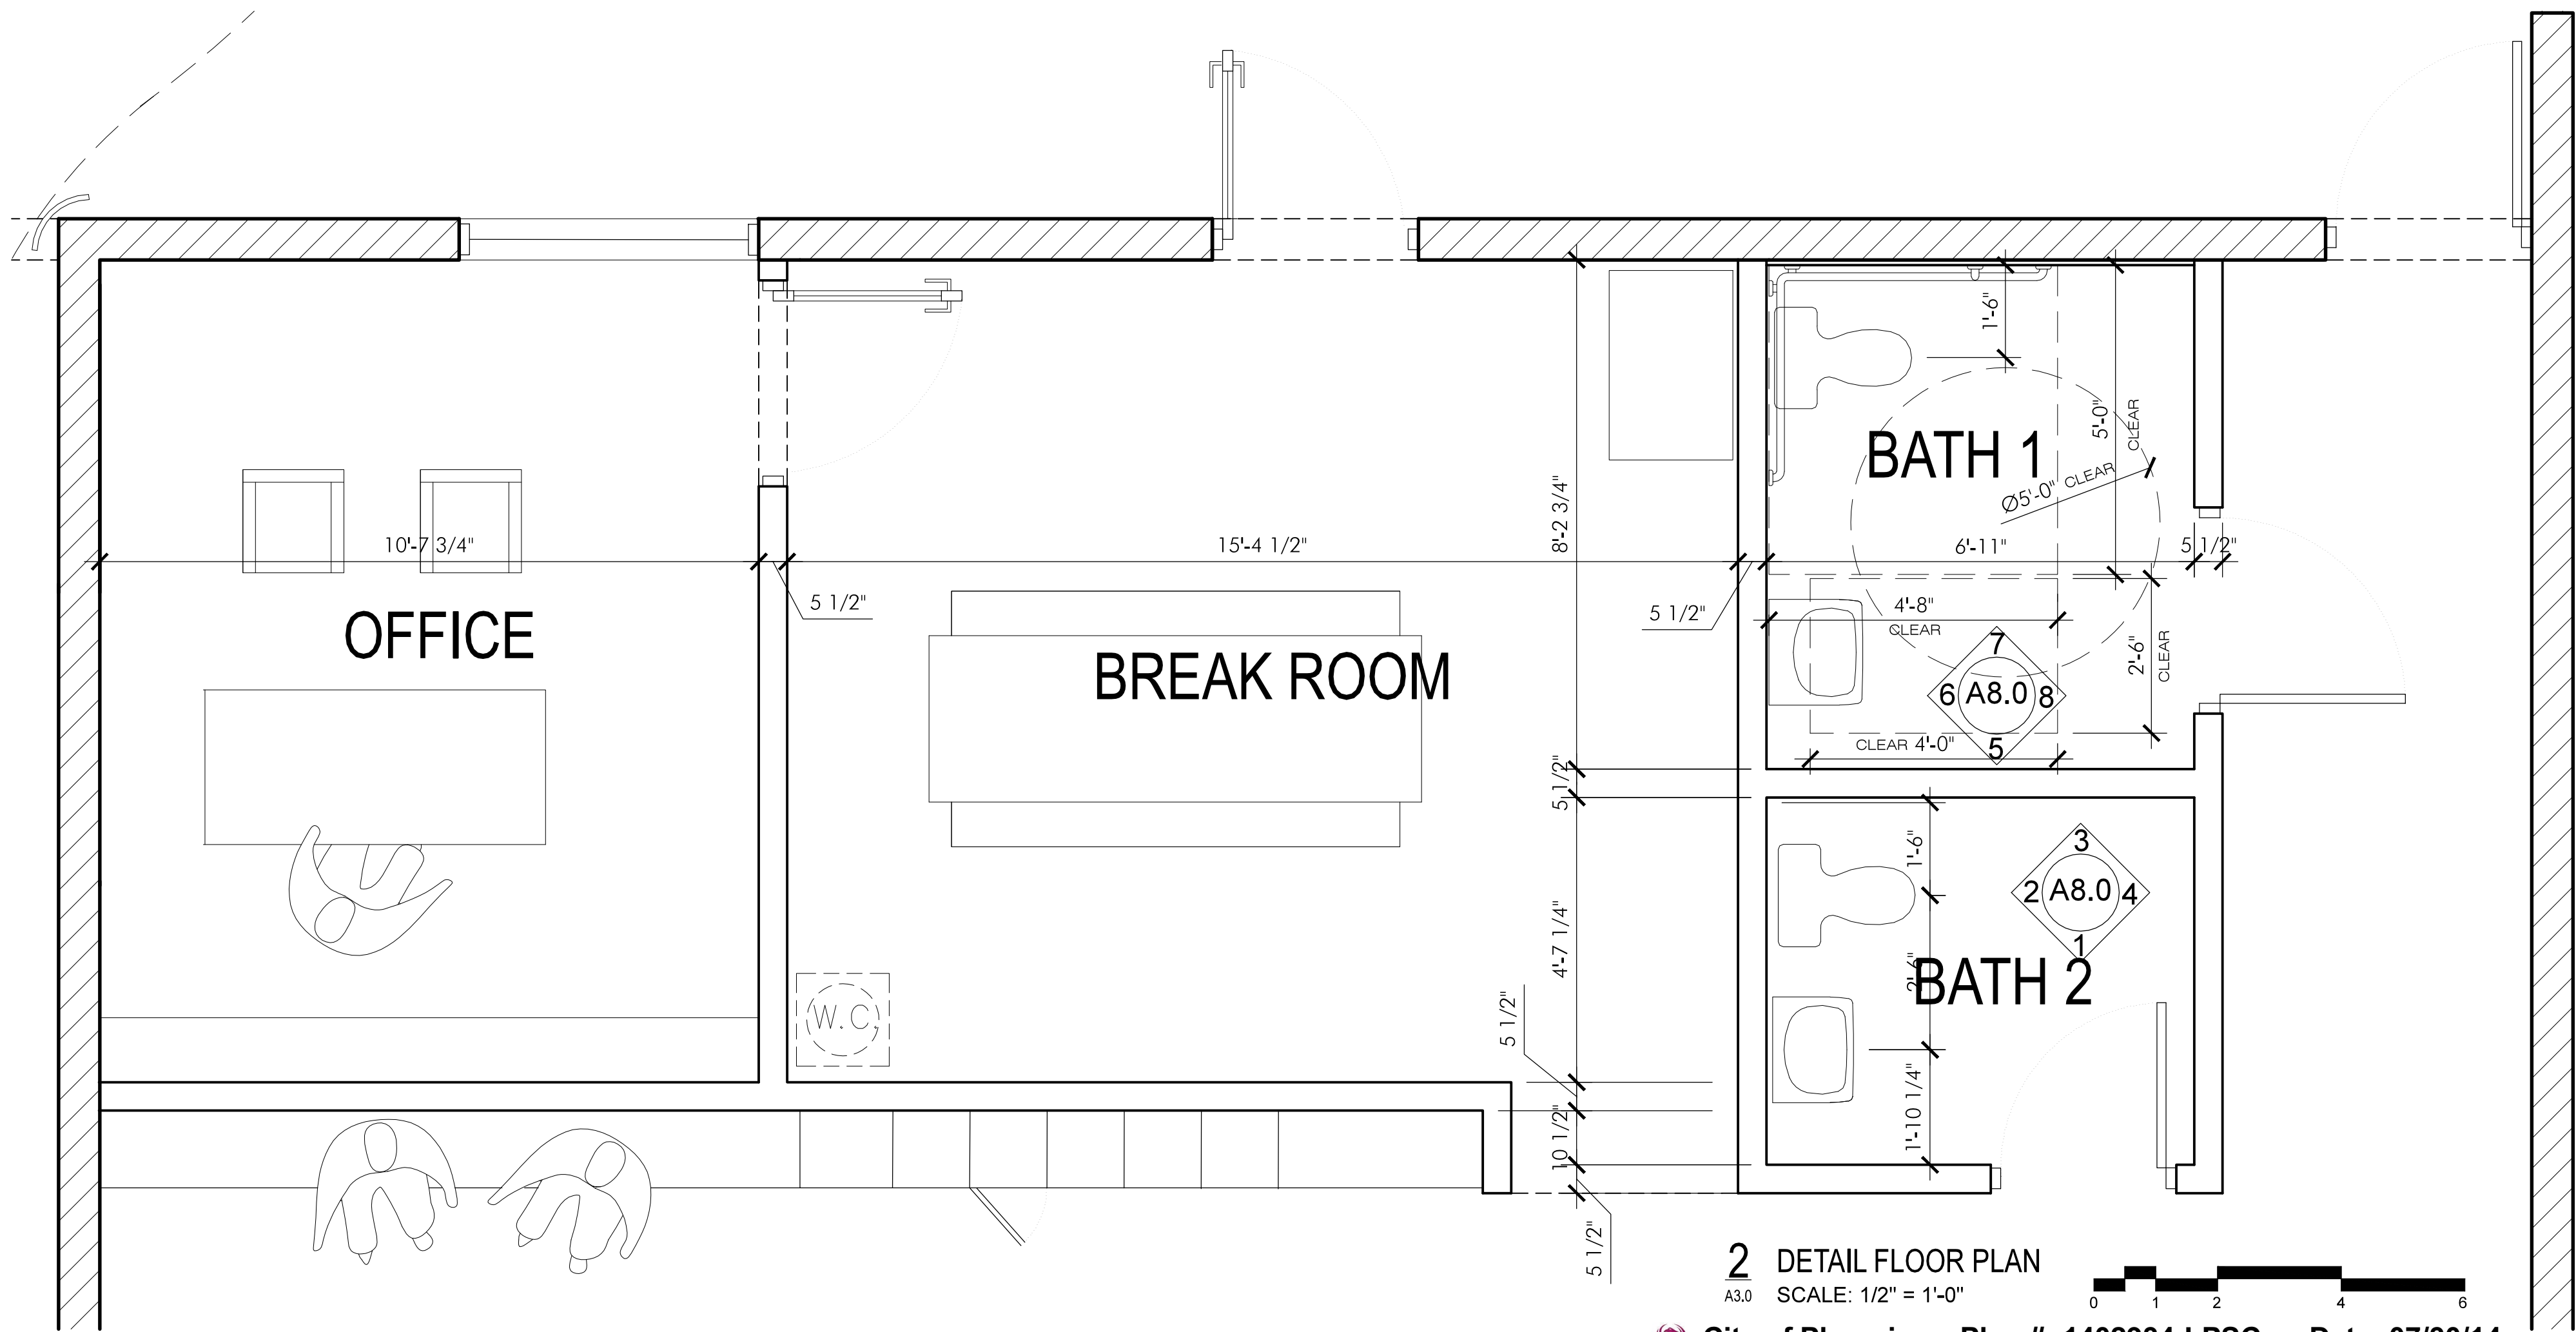

18.8'
AUDI A4 TURNING RADIUS

SELF CERTIFIED BY:
W. BRENT ARMSTRONG
07 July 2014
Plans were prepared, under the direct supervision of, or reviewed by the Self Certified Professional. Plans are complete. The plans are, as of the date of submission, in accordance with the requirements of the Phoenix Building Construction Code, and all other applicable laws.

SILVERCAR
1450 S. 16th Street, Phoenix, AZ 85034

A3.0
FLOOR PLAN

isos
architecture
307 West Latham Street, Phoenix, Arizona 85003
480 323 6928
brent@isosarchitecture.com



EXPIRES 9/30/2016

KIVA# 06-5236A8
SDEV#
LPR #
QS#

christophkaiser
828 NORTH CENTRAL AVENUE
PHOENIX ARIZONA 85004
602.897.1205
CHRISTOPH@CHRISTOPHKAISER.COM

