


LEGEND

- ASPH = Asphalt
- BM = Bench Mark
- BRG = Bearing
- CB = Catch Basin
- CBS = Concrete Block Structure
- CH = Chord
- Chatta = Chattahoochee
- CL = Center Line
- CLF = Chain Link Fence
- CL = Clear
- CONC = Concrete
- D = Delta
- Ø = Diameter
- DH = Drill Hole
- DME = Drainage & Maintenance Easement
- E.B. = Electric Box
- Enc. = Encroachment
- F.F. = Finish Floor
- F.H. = Fire Hydrant
- F.I.R. = Found Iron Rebar
- FTR. = Florida Power & Light
- F.I.P. = Found Iron Pipe
- FDI = Found
- L.P. = Light Pole
- M = Measured
- M.F. = Metal Fence
- M.H. = Manhole
- M = Monument
- N.A. = Not Applicable
- ND = Nail & Disc
- NTS = Not to Scale
- OS = Offset
- O.U.L. = Overhead Utility Lines
- Ø = Overlap
- P = Plat
- P.B. = Plat Book
- P.C. = Point of Curvature
- PCP = Permanent Control Point
- PG = Page
- P.I. = Point of Intersection
- E = Property Line
- PL = Planer
- P.O.B. = Point of Beginning
- P.O.C. = Point of Commencement
- P.P. = Power Pole
- P.R.M. = Permanent Reference Monument
- P.R.C. = Point of Reverse Curvature
- PT = Point of Tangency
- R = Radius
- R/R = Railroad
- PBM = Professional Surveyor
- Mapper
- RAW = Right-of-Way
- SWK = Sidewalk
- Sec. = Section
- (TYP) = Typical
- T = Target
- U.E. = Utility Easement
- W.F. = Wood Fence
- W.M. = Water Meter
- W.V. = Water Valve
- ⊙ = Denotes Spot Elevations Taken

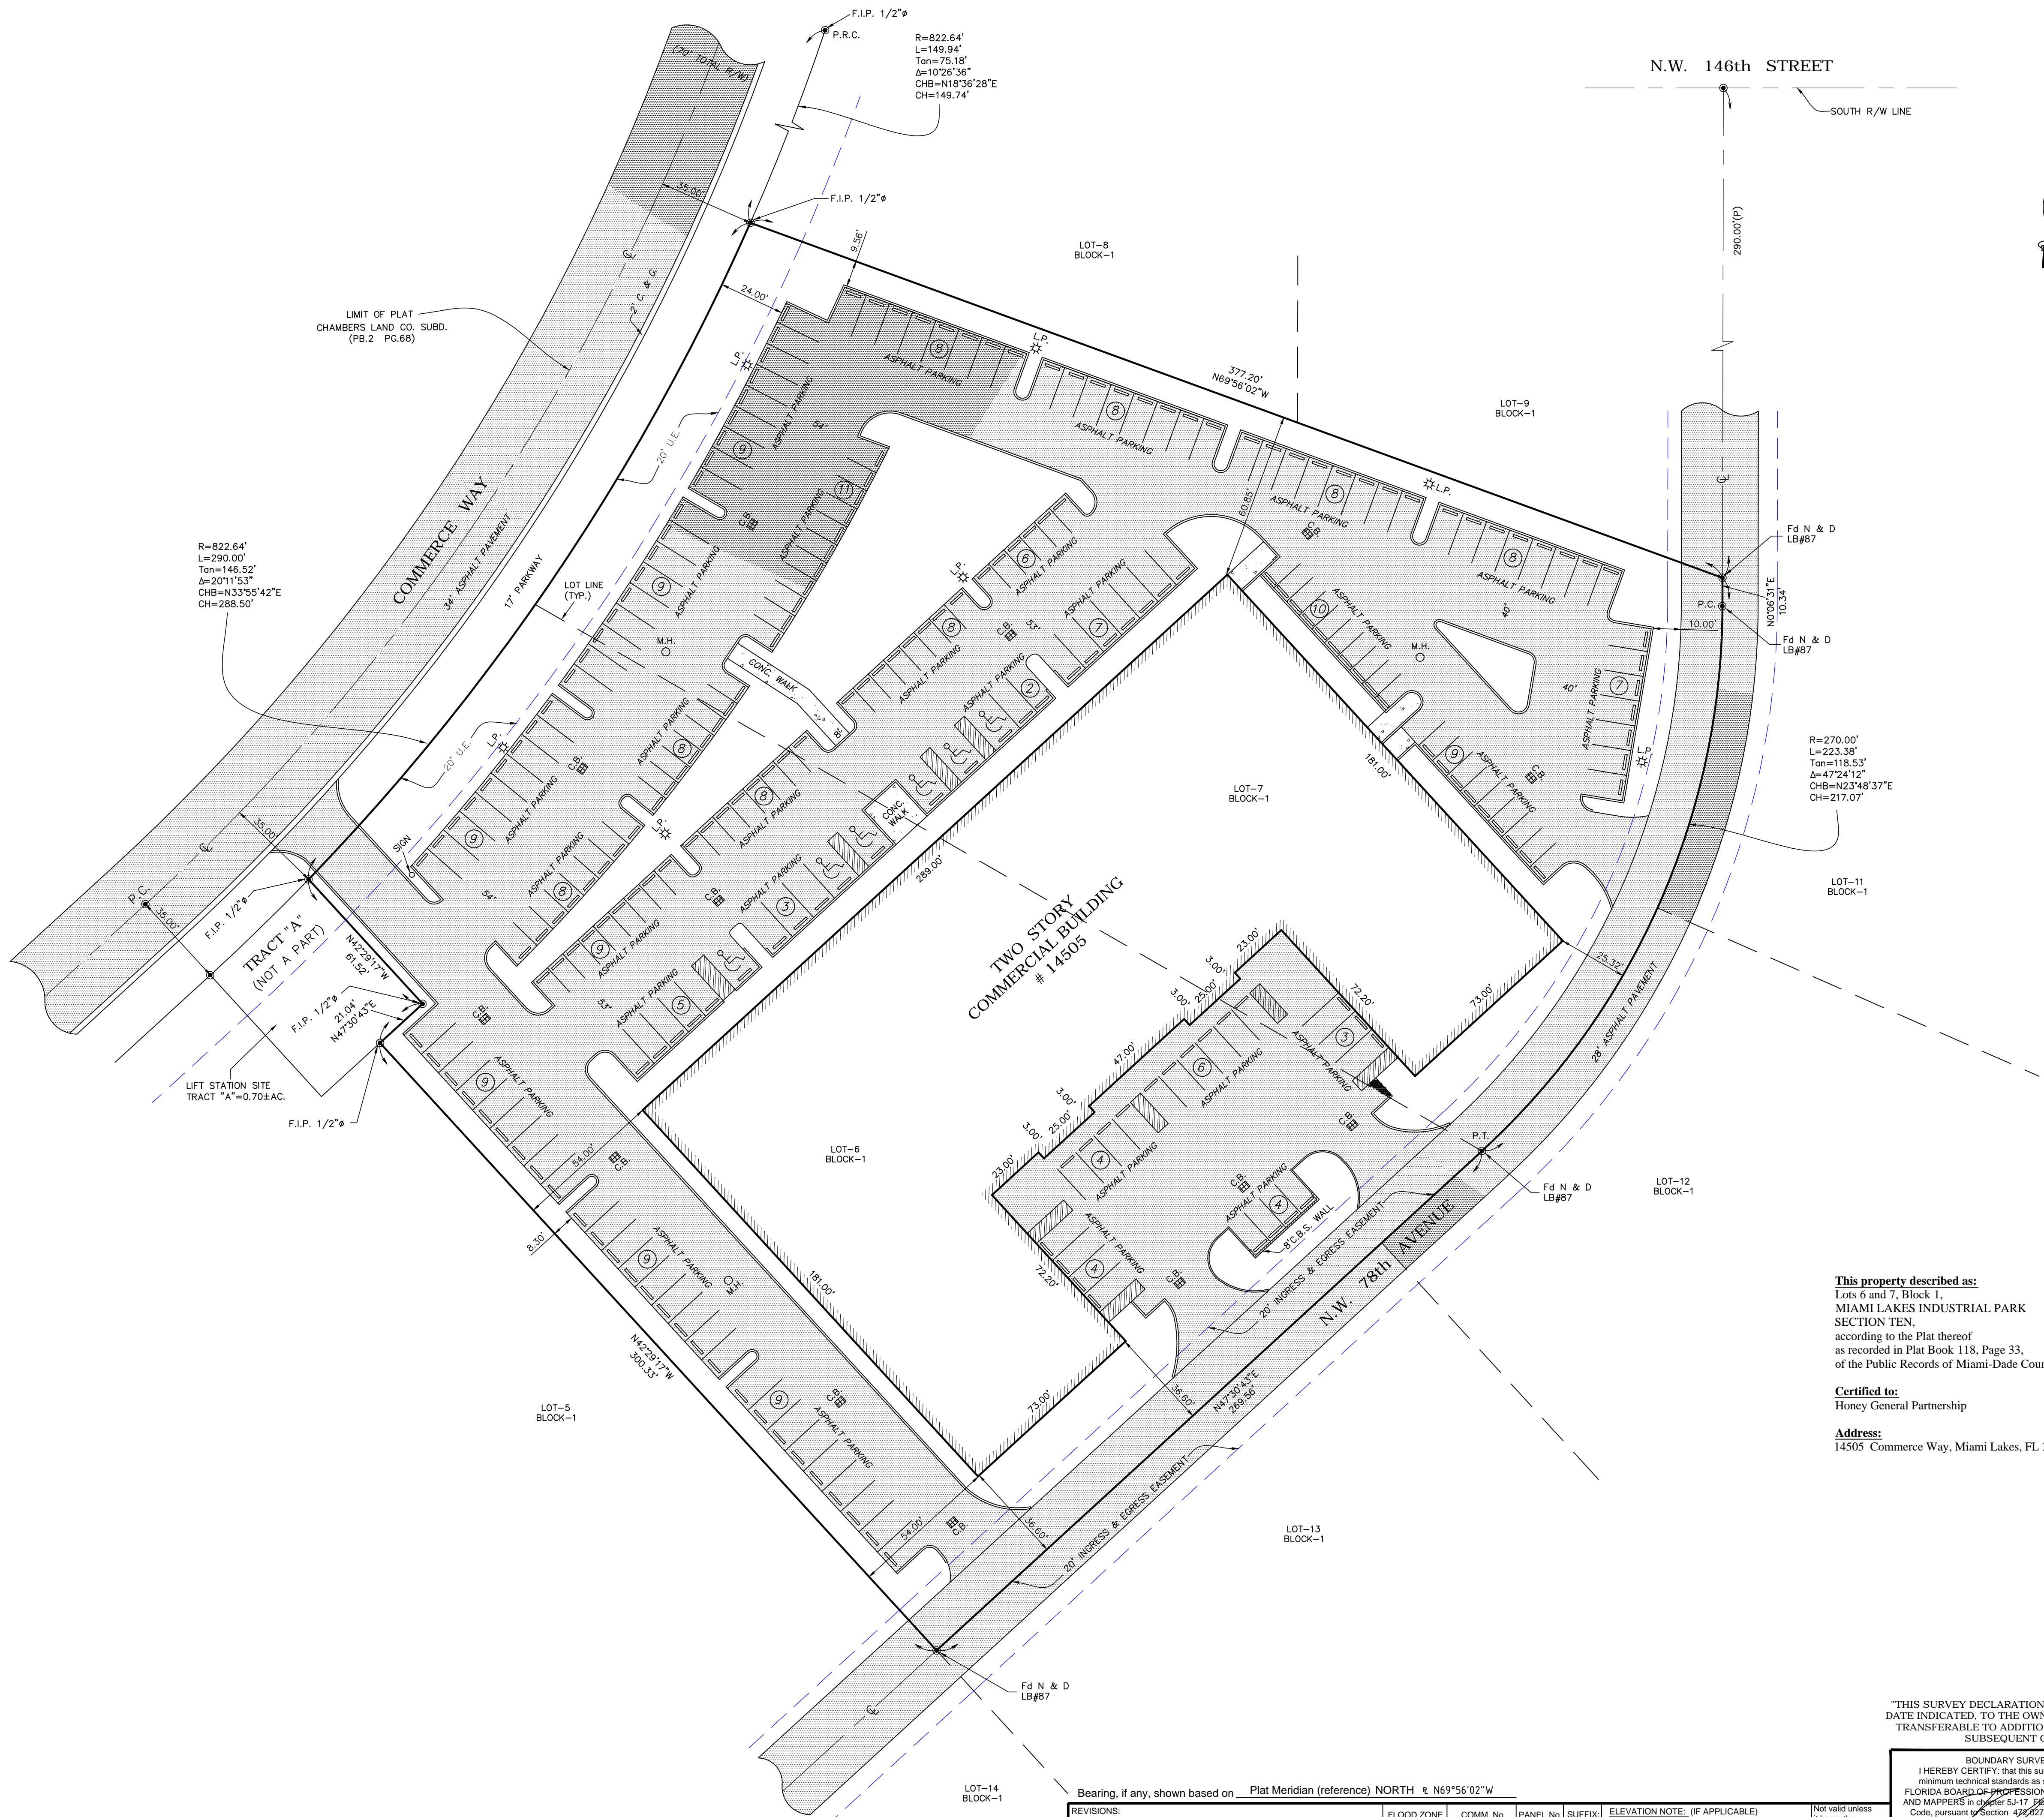

This property described as:
 Lots 6 and 7, Block 1,
 MIAMI LAKES INDUSTRIAL PARK
 SECTION TEN,
 according to the Plat thereof
 as recorded in Plat Book 118, Page 33,
 of the Public Records of Miami-Dade County, Florida.

Certified to:
 Honey General Partnership

Address:
 14505 Commerce Way, Miami Lakes, FL 33016

"THIS SURVEY DECLARATION IS MADE ON THE FIELD DATE INDICATED, TO THE OWNER(S) LISTED. IT IS NOT TRANSFERABLE TO ADDITIONAL INSTITUTIONS OR SUBSEQUENT OWNERS."

BOUNDARY SURVEY I HEREBY CERTIFY that this survey meets the minimum technical standards as set forth by the FLORIDA BOARD OF PROFESSIONAL SURVEYORS AND MAPPERS in Chapter 5J-17, Florida Administrative Code, pursuant to Section 472.027 Florida Statutes. RENE AGUIGUES VIVES 08/07/13 PROFESSIONAL SURVEYOR AND MAPPER No. 4327, State of Florida.	Alvarez, Aguiques and Associates, Inc. Surveyors, Mappers and Land Planners 5701 S.W. 107th Avenue #204, Miami, FL 33173 Phone 305.220.2424 Fax 305.552.8181 L.B. No. 6867 / E-mail: aaasurvey@aol.com	
	Field Date	Drawn by:
	07/27/13	R.S.
Scale:	Drwg. No.:	
1"=30'	13-16308	

REVISIONS:		FLOOD ZONE		COMM. No.		PANEL No.		SUFFIX:		ELEVATION NOTE: (IF APPLICABLE)	
No.	Date	AE	120686	0114	L	Lowest adjacent grade elevation =	NA	Elev. =	NA	BM	NA
1	09/11/09					+ 6.00'	N.G.V.D.				

NOT: Encroachments and encroachments shown herein are the property of the applicant herein, and are not to be construed as a conveyance of any interest in the property. The applicant is responsible for the accuracy of the information provided herein. The minimum distance accuracy for the type of boundary measurement used is indicated in the minimum technical standards. The minimum distance accuracy for the type of boundary measurement used is indicated in the minimum technical standards. The minimum distance accuracy for the type of boundary measurement used is indicated in the minimum technical standards. The minimum distance accuracy for the type of boundary measurement used is indicated in the minimum technical standards.

NOT: Encroachments and encroachments shown herein are the property of the applicant herein, and are not to be construed as a conveyance of any interest in the property. The applicant is responsible for the accuracy of the information provided herein. The minimum distance accuracy for the type of boundary measurement used is indicated in the minimum technical standards. The minimum distance accuracy for the type of boundary measurement used is indicated in the minimum technical standards. The minimum distance accuracy for the type of boundary measurement used is indicated in the minimum technical standards. The minimum distance accuracy for the type of boundary measurement used is indicated in the minimum technical standards.