

Version: revv	
Print Date	7/09/2026 06:10 PM
Owner	AJ Sharko
Detail #	123123998
Store	0179
Customer Information	
Customer Name	Gainesville measure
Phone Number	123123123
Email Address	
Install Address	065 NW 22nd St Suite A Gainesville, Florida 32653

Flooring	Style	Color
Vinyl Plank	VINYL_PLANK	COLOR 1

VINYL_PLANK

Q & A

Job Type	Replacement
Areas To Update	7
Timeframe of Build	Before 1978
Haul Away Needed	No
Carpet Haul Away	0
Glue Down Carpet Removal	0
Floating Floor Haul Away	0
Anchored Floor Haul Away	0
Tile Haul Away	0
Sheet Vinyl Haul Away	0
Floor Stripping Machine Charge	0
LVP Square Footage	3593
Vinyl Install Type	Glue Down LVP
Vinyl Pattern	No Pattern
Vinyl Pattern Description	N/A

Vinyl Custom Pattern Charge	0
Vinyl Item Number	0
Vinyl Model Number	COLOR 1
Moulding Item Number	0
Provider-Supplied Transitions	No
Transition Type	Vinyl
Transition Linear Feet	28
Quarter Shoe Linear Feet	423
New Base Moulding Description	Molding - Vinyl Cove Base; Molding, 3/4" Rnd - White;
Perimeter Seal	694
New Base Moulding Linear Feet	148
Tear Out Plywood Underlayment	0
Advanced Subfloor Prep	3326
Remove Existing Baseboard	0
Replace Existing Baseboard	0
Removal of Moulding/ QTR	0
Undercut Cabinet/ Fireplace (LF)	0
Tear Out Backerboard	0
Installation of Stairs?	No
Choose Installation Method	Complex Stairs
Number of Stair Kits Needed	0
Number of Stair Nose	0
Number of Additional Stair Risers	0
Number of Boxed Steps	0
Number of Open Steps/Landings	0
Additional Chargeable Work Stairs	No
Additional Stair Work Description	
Additional Stair Work Charge	0

Plywood Underlayment Sqft	0
Subfloor Composition	Concrete
Subfloor Wood Type	Not Applicable
Sublevel Damage Comments	Potentially
Moisture Reading	Yes
Moisture Reading Value	0.0
Liquid Moisture Barrier	No
Moisture Barrier Charge	0
Are there Rooms with Furniture to Move?	No
Rooms with Furniture to Move	0
Are there Rooms with Bulky or Complex Furniture to Move?	No
Number of Rooms with Bulky or Complex Furniture	0
Description of Bulky or Complex Furniture	N/A
Appliances to Move	0
Ice Makers to Disconnect	0
Toilets to Replace	0
Pedestal Sink Charge	0
Permit Holder	No Permit Required
Permit Fee	0
Additional Mileage	0
Access Fee	0
Acclimation and Handling Fee	Yes
Additional Chargable Work	No
Additional Work Description	
Additional Work Charge	0
Lead Safe Practices Required	No
Additional Comments	N/A
State	Florida

Materials

Caulk, White Caulk, 4.0 Tube(s)	4.0 Tube(s)
---------------------------------	-------------

Glue - Vinyl Plank (per manufacture needed if glue down is sold), 48.0 Bucket(s)	48.0 Bucket(s)
Glue, Cove Base Adhesive (Lrg Tubes) #4064856, 148.0 Lin. Ft.	148.0 Lin. Ft.
Leveler - Embossing - Skim Coat, 29.0 Bag(s)	29.0 Bag(s)
Molding - Vinyl Cove Base, 148.0 Lin. Ft.	148.0 Lin. Ft.
Molding, 3/4" Rnd - White, 423.0 Lin. Ft.	423.0 Lin. Ft.
Transition, (Vinyl Plank) Threshold, 28.0 Lin. Ft.	28.0 Lin. Ft.

Lead Assessment

Lead Safe Practices	No
Lead Response Reason	Not disrupting 6 sq ft interior or 20 sq feet exterior
Renovator Certified	Yes

Comments

Hard Surfaces			
VINYL_PLANK: *** MUST BE SAME BATCH and/or LOT NUMBER ***			
Customer Responsibility			
Handling: Bath 1 - Toilet (Removal Only, Plumber Reset):			
Handling: Office 1 - Computers/Electronics: This item must be removed from the installation area by the Customer prior to the install.			
Handling: Office 1 - Desk, Oversize:			
Handling: Office 1 - Table, Oversize:			
Store Notes			
Project: *Unforeseen - Addit'l charges TBD @ time of install for floor preperation			
Project: Not sure what kind of flooring is supposed to be ordered			
Project: z- Please go over furniture policy with customer			
Disclaimers			
Dimensions			
Room Name	Area (Sq. Ft.)	Perimeter (Lin. Ft.)	Walls (Lin. Ft.)
Bath 1	111	45	41
Bath 2	111	48	44
Hall 1	286	104	72
Hall 1 Clos 1	48	32	29
Kit	169	53	50
Lobby	1953	219	197

Office 1	648	105	88
Total	3326	606	521



Flooring Detail Diagram - Level: MAIN - LVL 1




Customer: Gainesville measure

Store #0179

Detail PO: 123

Installer: Floor Interior Services

****Draw layout diagram and seam locations on the grid - Return by Fax to Installed Sales Production Office or CPO, if applicable.****

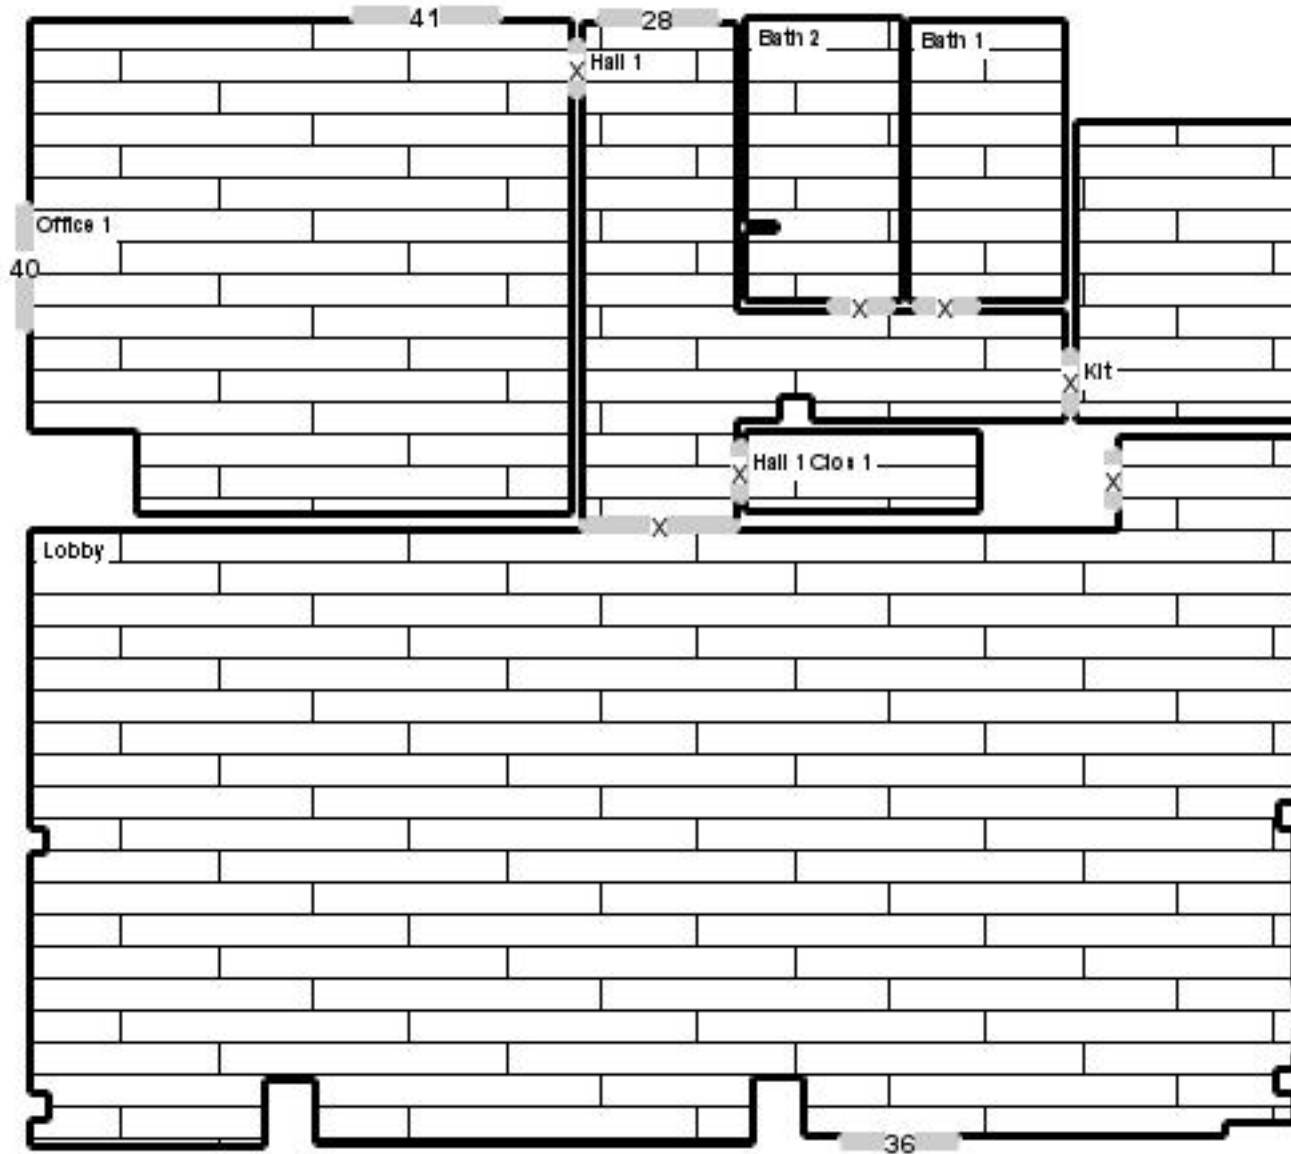

Matl. Type	Room	Recommended Material Needed	Actual Room Size
V	Lobby	2111.6 Sq. Ft.	1953 Sq. Ft.
V	Office 1	700.1 Sq. Ft.	648 Sq. Ft.
V	Hall 1	308.5 Sq. Ft.	286 Sq. Ft.
V	Kit	182.3 Sq. Ft.	169 Sq. Ft.
V	Bath 2	119.4 Sq. Ft.	111 Sq. Ft.
V	Bath 1	119.4 Sq. Ft.	111 Sq. Ft.
V	Hall 1 Clos 1	51.2 Sq. Ft.	48 Sq. Ft.

TOTAL: 3593 Sq. Ft. 3326 Sq. Ft.

Installation fees will be and additional charges may be based on total flooring recommended by the installer (based on the installer's assessment of unique characteristics of your project). The installer's recommendation will include waste and will exceed actual room square footage.

Material Type Legend: "C" (Carpet), "H" (Hardwood/Laminate), "V" (Vinyl), "T" (Tile)

Site Questions					
New Construction?	No	Restricted Parking Access?	No	Empty Garage?	No
Paved Driveway?	No	Electricity Available?	No	Freshly Painted Walls?	No
Is site climate-controlled year round?	No	Elevator available?	Yes	Pets at the Site?	No
Difficult Access?	No	Site is Empty?	No	Full Site Measurement?	No
Project Scope Explained to Customer?	No	Site Has Full Basement?	No	Does Crawlspace have Moisture Barrier?	No
Is ladder needed for Install?	No	Rapid Install - 1029709	No	Is there RADIANT HEAT present?	No
Building Type: Commercial			Construction Date: Unknown		

Transition Details		
ID	Description	Length
36	Transition, (Vinyl Plank) Threshold	5' 11"
40	Transition, (Vinyl Plank) Threshold	6' 2"
41	Transition, (Vinyl Plank) Threshold	7' 4"
28	Transition, (Vinyl Plank) Threshold	6' 0"

Room/Product Connections			
Trans ID	Level	Type	Level Change
26	MAIN - LVL 1	Door	No level change from Vinyl Plank (Bath 1) to Vinyl Plank (Hall 1)
27	MAIN - LVL 1	Door	No level change from Vinyl Plank (Bath 2) to Vinyl Plank (Hall 1)
28	MAIN - LVL 1	Door	No level change from Vinyl Plank (Hall 1) to Outside (Other Room)
33	MAIN - LVL 1	Door	No level change from Vinyl Plank (Hall 1) to Vinyl Plank (Hall 1 Clos 1)
34	MAIN - LVL 1	Door	No level change from Vinyl Plank (Hall 1) to Vinyl Plank (Kit)
35	MAIN - LVL 1	Opening	No level change from Vinyl Plank (Hall 1) to Vinyl Plank (Lobby)
36	MAIN - LVL 1	Door	No level change from Vinyl Plank (Lobby) to Outside (Other Room)
37	MAIN - LVL 1	Door	No level change from Vinyl Plank (Lobby) to VCT (Other Room)
38	MAIN - LVL 1	Door	No level change from Vinyl Plank (Lobby) to Unknown Flooring (Other Room)
39	MAIN - LVL 1	Door	No level change from Vinyl Plank (Hall 1) to Vinyl Plank (Office 1)
40	MAIN - LVL 1	Door	No level change from Vinyl Plank (Office 1) to Outside (Other Room)
41	MAIN - LVL 1	Door	No level change from Vinyl Plank (Office 1) to Outside (Other Room)



Build for the Future!

Customer Information			
Name:	Gainesville measure	Primary Phone:	123123123
Address:	065 NW 22nd St Suite A	Secondary Phone:	
	Gainesville, Florida 32653	Home Phone:	123123123
		Mobile Phone:	
Email:		Work Phone:	

Contact Information						
Title	Person	Company	Work Phone	Mobile Phone	Fax Number	Email
Project Contact:	LS 0179	Lowe's 0179	386-719-6622	386-719-2058		
Address:	3463 NW Bascom Norris Drive - Lake City, Florida 32055					
Sales Associate:	N/A					

Appointments					
Appointment Type	Date	Confirmation	Assigned Person	Mobile Number	Scheduled By
Measure	N/A	Unconfirmed	N/A	N/A	AJ Sharko
Note:					

Project Photos

Kit



Bath 1



Bath 2



Bath 2



Project Photos

Hall 1



Hall 1



Hall 1 Clos 1




Lobby



Lobby



Office 1

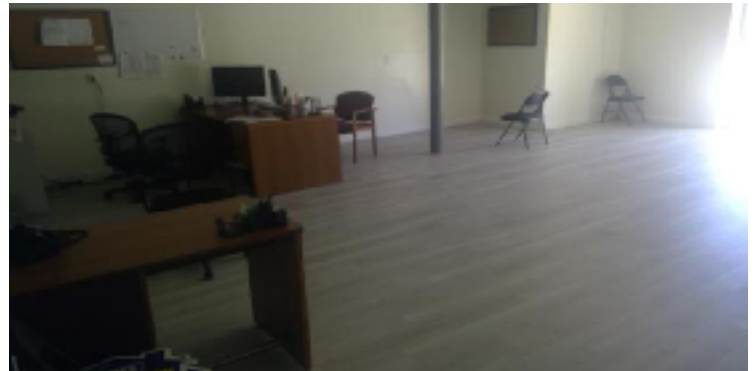

Project Photos

Office 1



Street View

