


**FLOOR PLAN Building "B"**  
 SCALE: 1/8" = 1'-0"  
 NORTH

**CONSTRUCTION NOTES:**

1. 4" CONCRETE SLAB WITH 6 X 6 10/10 W.W.F. ON VAPOR BARRIER ON COMPACTED FILL.
2. 4" CONCRETE SIDEWALK WITH 6 X 6 10/10 ON COMPACTED FILL, BROOM FINISH.
3. 8" CONCRETE BLOCK REINFORCED WITH HORIZ. GALVANIZED MASONRY REINF. @ 16" O.C. FILL ALL CELLS WITH FOAMED IN PLACE INSULATION. PAINT EXTERIOR OF BLOCK.
4. 1 HOUR RATED TENANT DEMISING WALL: 6" 18 GA. METAL STUDS @ 16" O.C. TO UNDERSIDE OF ROOF DECK WITH 5/8" FIRE-RATED GYPSUM BOARD EACH SIDE. INSTALL 6" BATT INSULATION FULL HEIGHT OF WALL. TAPE, FLOAT & SAND WALL.
5. PARTITION WALL: 6" METAL STUDS @ 16" O.C. 18 GA. BRACE TO 10'-0" A.F.F. INSTALL 5/8" GYPSUM BOARD EACH SIDE TO 6" ABOVE CEILING ON SALES ROOM SIDE AND TO UNDERSIDE OF ROOF DECK ON STOCKROOM SIDE. TAPE, FLOAT, & SAND WALL.
6. PARTITION WALL: 6" METAL STUDS @ 16" O.C. 22 GA. TO 10'-0" A.F.F. INSTALL 5/8" GYPSUM BOARD EACH SIDE. INSTALL 8" METAL CEILING JOISTS @ 16" O.C. INSTALL 3/4" PLYWOOD PLATFORM AT TOP JOISTS FOR WATER HEATER PLATFORM. INSTALL 5/8" GYP. BD. TO UNDERSIDE OF CEILING JOISTS.
7. 8" CONCRETE BLOCK REINFORCED WITH HORIZ. GALVANIZED MASONRY REINF. @ 16" O.C. FILL ALL CELLS WITH FOAMED IN PLACE INSULATION. PAINT INTERIOR AND EXTERIOR OF BLOCK.
8. FLOOR CONCRETE BLOCK WITH 1/8" METAL FURRING CHANNELS. INSTALL 5/8" GYPSUM BOARD TO 6" ABOVE CEILING.
9. BULK-HEAD WALL: 3 COURSES 8" SPLIT-FACE CMU.
10. BRONZE ALUM STOREFRONT FROM TOP OF BULK-HEAD TO 10'-0" A.F.F.
11. PARTITION WALL: 3-5/8" METAL STUDS 22 GA. @ 16" O.C. TO 8'-0" A.F.F. W/ 5/8" GYPSUM BOARD EACH SIDE. TAPE, FLOAT & SAND. INSTALL BLOCKING IN WALL FOR TOILET ACCESSORIES.
12. PARTITION WALL: 6" METAL STUDS @ 16" O.C. 18 GA. TO 10'-0" A.F.F. INSTALL 5/8" BOARD EACH SIDE. INSTALL 8" METAL CEILING JOISTS @ 16" O.C. INSTALL 3/4" PLYWOOD PLATFORM FOR WATER HEATER. INSTALL 5/8" GYPSUM BOARD TO UNDERSIDE OF CEILING JOISTS (MENS TOILET ROOM ONLY) WOMENS TOILET ROOM TO HAVE SUSPENDED ACoust. CLG. @ 8'-0" A.F.F.
13. PLUMBING WALL: 6" METAL STUDS 22 GA. @ 16" O.C. TO 8'-0" A.F.F. INSTALL 5/8" GYPSUM BOARD. TAPE, FLOAT & SAND WALL. INSTALL BLOCKING FOR TOILET ACCESSORIES.

**SHOPS For SCHILLINGER  
 MOBILE COUNTY, ALABAMA**

FILE NO	2001-0008
DWG BY	ENS, DBB
REVISIONS	
ISSUE DATE	11-19-01

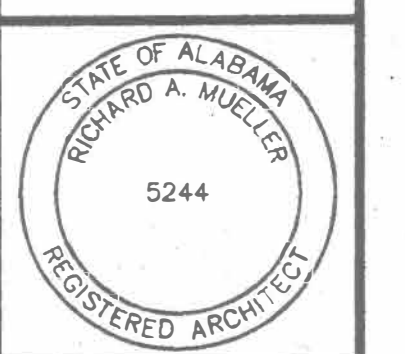

SHEET NUMBER:  
**A-1**