




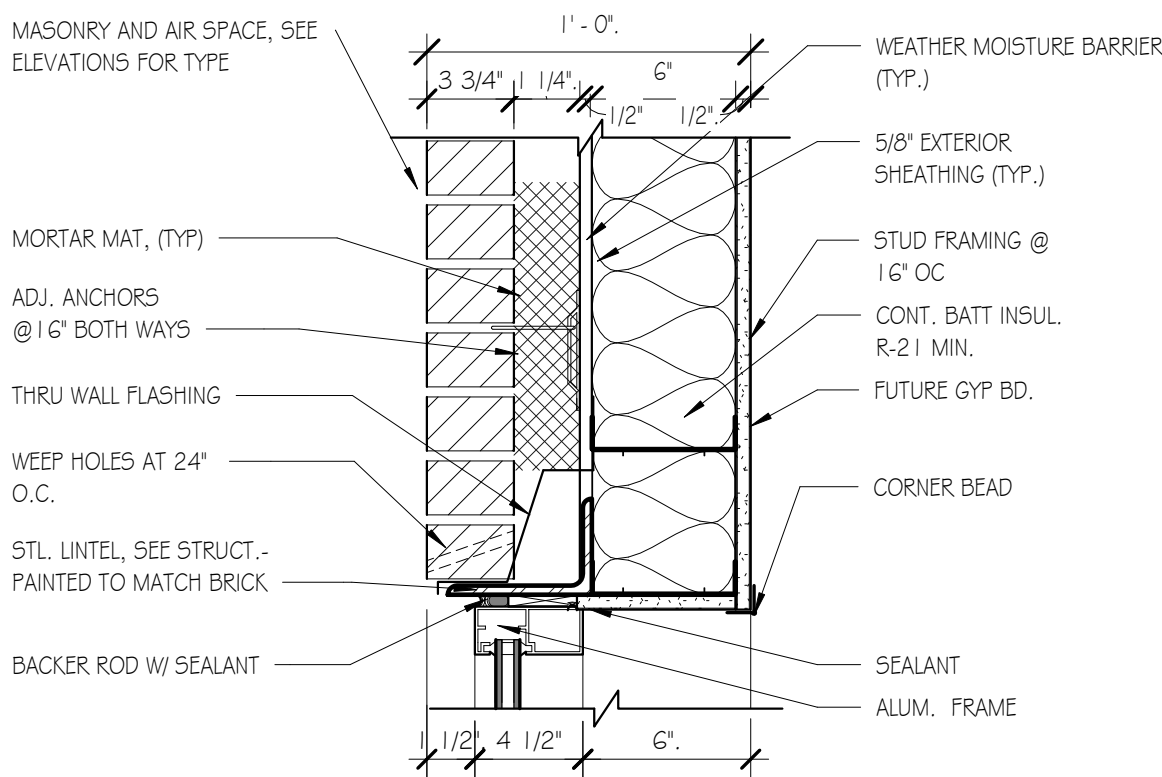


1 HEAD - STOREFRONT W/ BRICK VENEER
1 1/2" = 1'-0"

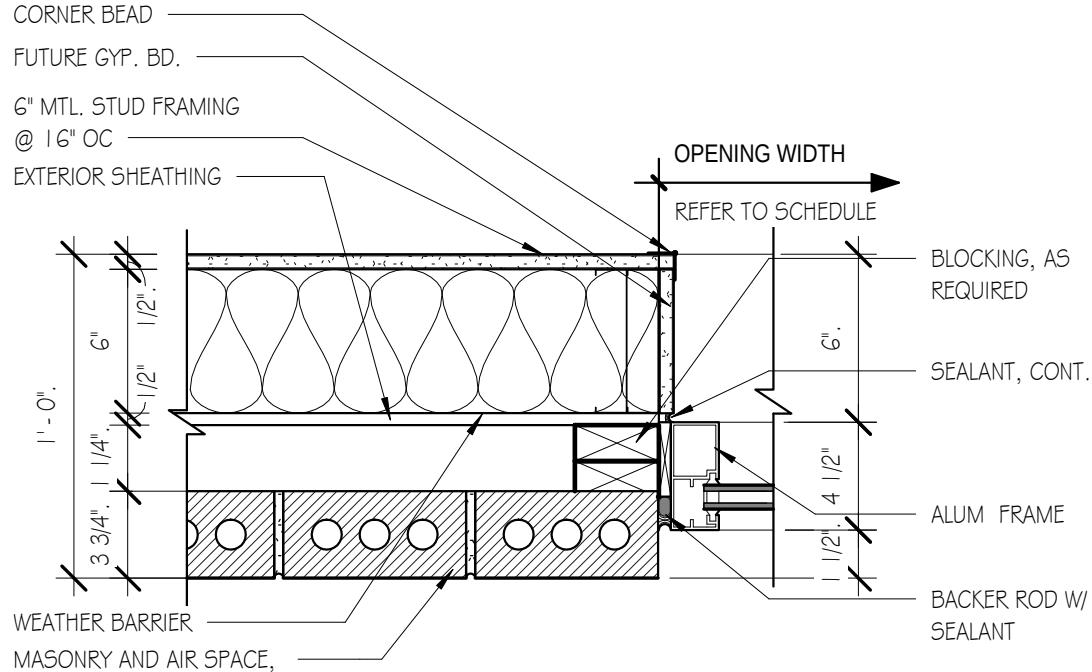


2 JAMB - STOREFRONT W/ BRICK VENEER
1 1/2" = 1'-0"

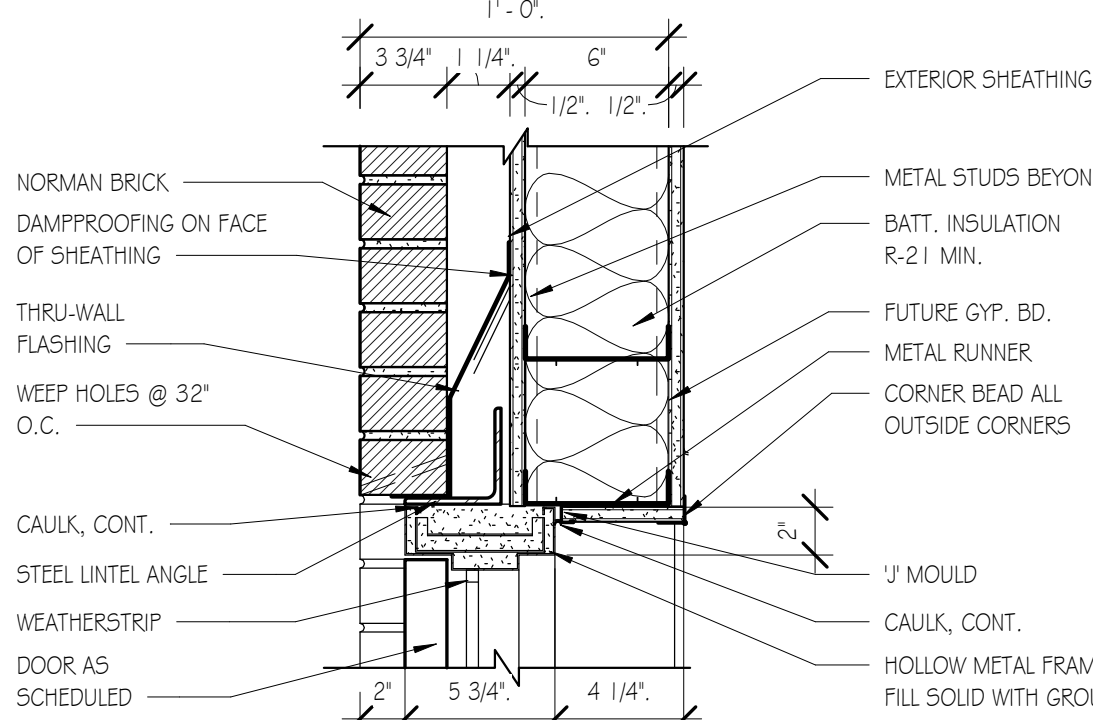


5 HEAD - HOLLOW METAL W/ BRICK VENEER
1 1/2" = 1'-0"

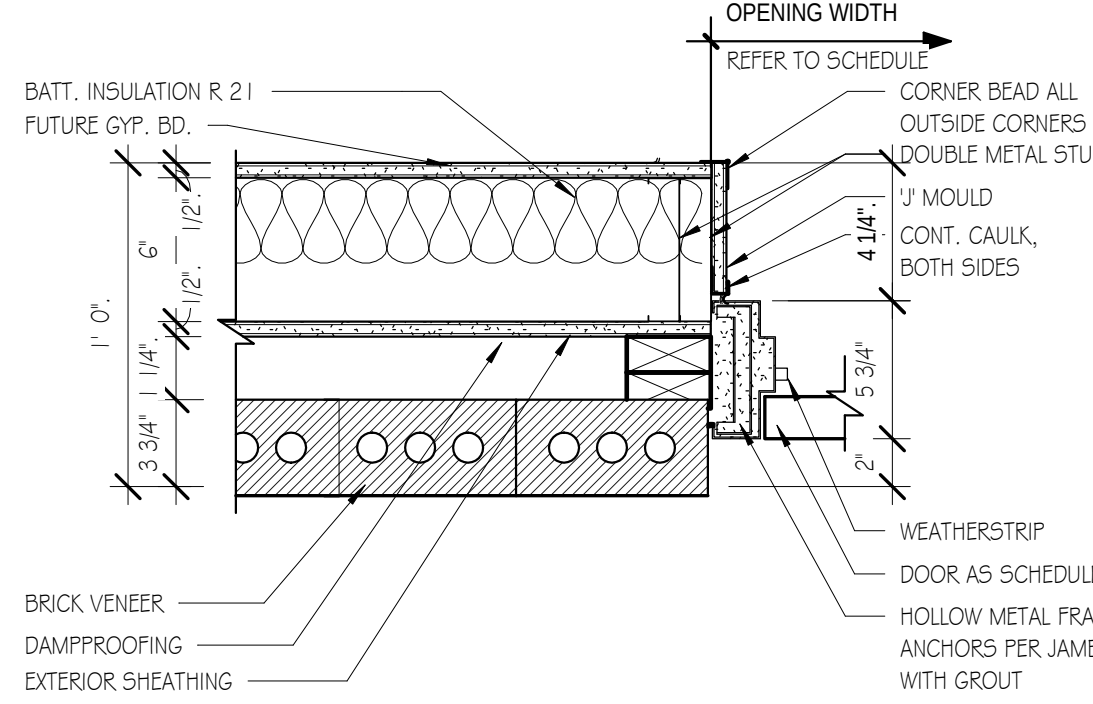


6 JAMB - DOOR BRICK
1 1/2" = 1'-0"

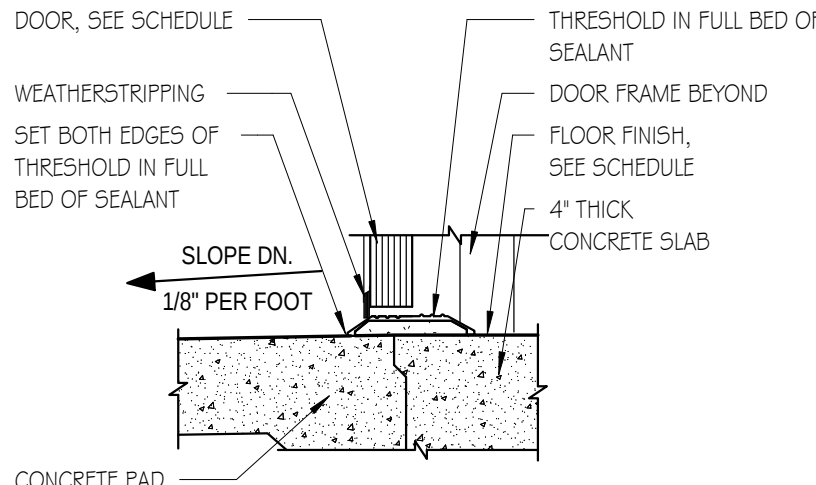


22 SILL - H.M. INSUL. DOOR
1 1/2" = 1'-0"

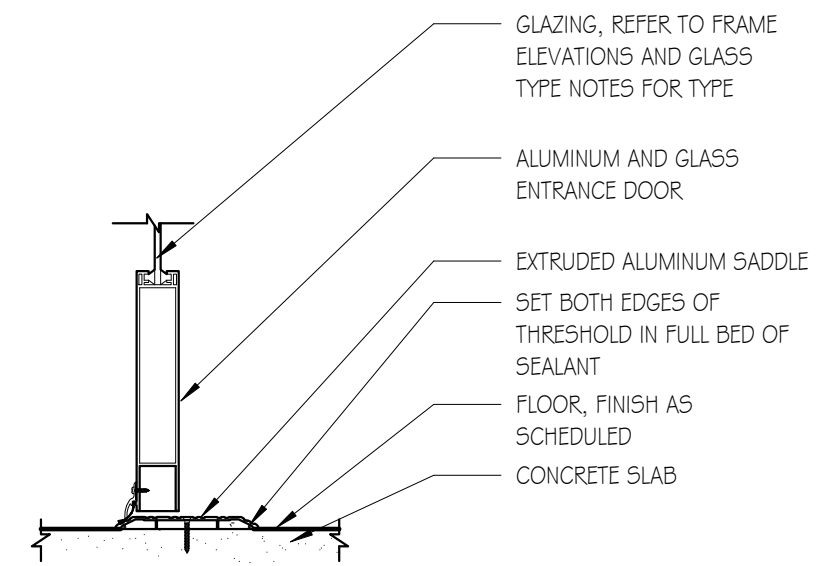

11 SILL - ALUM. DOOR
1 1/2" = 1'-0"

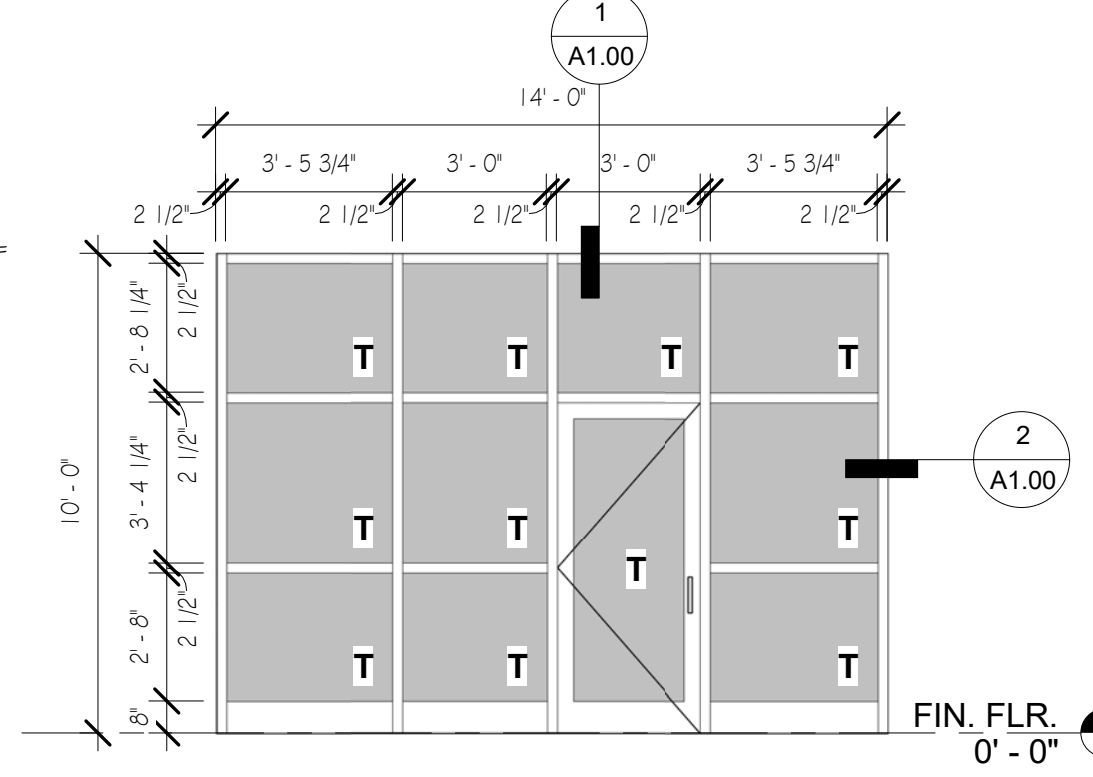

7 STOREFRONT ENTRY
1/4" = 1'-0"

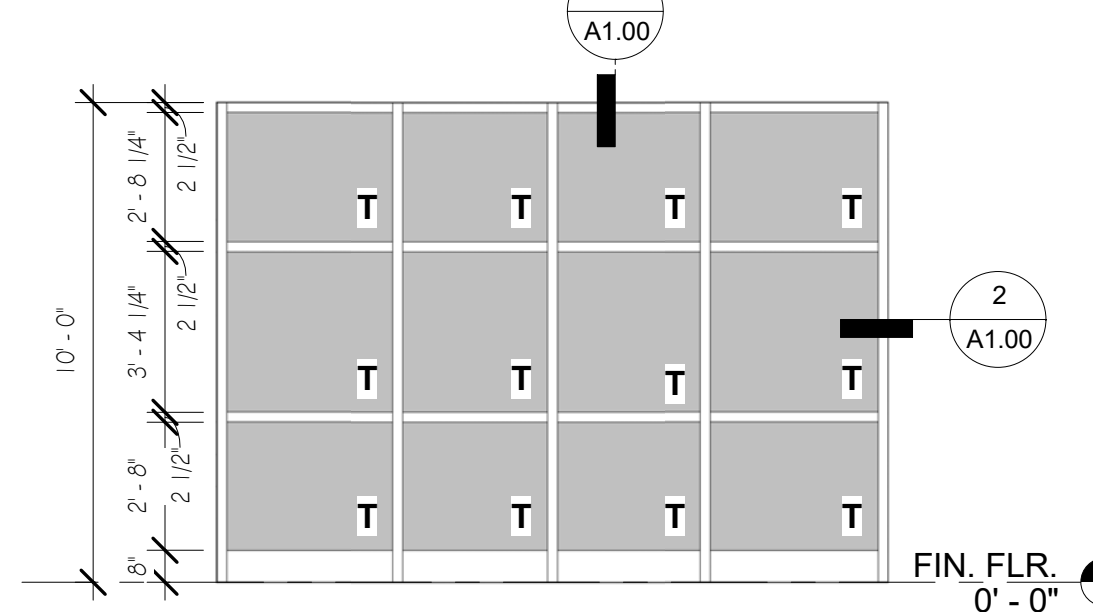

8 STOREFRONT WINDOW
1/4" = 1'-0"


GENERAL NOTES:

1. THE WORK INCLUDES THE FURNISHING OF ALL LABOR, MATERIALS, EQUIPMENT AND SERVICES NECESSARY FOR AND REASONABLY INCIDENTAL TO THE COMPLETION OF ALL WORK AS ILLUSTRATED AND DESCRIBED IN THESE DRAWINGS. ALL SUCH WORK IS TO BE DONE BY THE GENERAL CONTRACTOR, UNLESS NOTED OTHERWISE. THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR SECURING ALL REQUIRED BUILDING PERMITS, AND, FOR INSURING THAT ALL WORK CONFORMS TO APPLICABLE BUILDING CODES.
2. THE GENERAL CONTRACTOR SHALL COMPLY WITH ALL LOCAL, STATE, AND FEDERAL CODES AND REGULATIONS REGARDING CONSTRUCTION, MATERIAL DISPOSAL, AND SAFETY.
3. THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR MAINTAINING SAFE AND HAZARD-FREE CONDITIONS AT ALL TIMES DURING CONSTRUCTION.
4. THE GENERAL CONTRACTOR SHALL HAVE DIRECT CONTROL AND MANAGEMENT OF ALL CONSTRUCTION OPERATIONS AND BE RESPONSIBLE FOR THE SATISFACTORY OVERALL PERFORMANCE OF ALL HIS SUPPLIERS AND SUBCONTRACTORS, AS WELL AS ALL ASSIGNED CONTRACTORS.
5. ALL EXTERIOR WOOD BLOCKING, BRACING AND/OR SHEATHING TO BE PRESSURE-TREATED MATERIAL.
6. CONTRACTOR SHALL VERIFY ALL DIMENSIONS ON THESE PLANS AND NOTIFY ARCHITECT OF ANY DISCREPANCY.
7. FULLY INSULATE ALL PIPING IN EXTERIOR WALLS AND IN CHASES ADJACENT TO EXTERIOR WALLS.
8. MECHANICAL AND ELECTRICAL APPARATUS PENETRATING WALLS AT EXPOSED STRUCTURE AREAS SHALL BE SEALED AIR TIGHT.
9. ALL PENETRATIONS THROUGH RATED ASSEMBLIES (WHERE APPLICABLE) SHALL BE FIRE RATED PER CODE.
10. WHERE COLOR AND DESIGN SELECTIONS ARE REQUIRED, THE GENERAL CONTRACTOR SHALL SUBMIT SAMPLES TO THE ARCHITECT FOR SELECTION AND APPROVAL.
11. GENERAL CONTRACTOR IS RESPONSIBLE FOR TURNING OVER THE PREMISES IN A CLEAN CONDITION.
12. GUARANTEE: ALL WORKMANSHIP AND MATERIALS SHALL BE GUARANTEED FOR A PERIOD OF ONE YEAR (MINIMUM) FROM THE DATE OF SUBSTANTIAL COMPLETION, UNLESS SPECIFIED OTHERWISE FOR A LONGER PERIOD OF TIME ON SPECIFIED ITEMS.


DOORS:

01- TYP STOREFRONT EXIT DOOR
3'-0" W X 7'-0" H ALUMINUM DOOR
MEDIUM STILE
3 BUTTS
ADA THRESHOLD
MFR. STANDARD PUSH / PULL
TEMPERED GLASS
WEATHER STRIPPING

02- TYP REAR EXIT DOOR
3'-0" W X 6'-8" H INSUL. METAL DOOR
HOLLOW METAL FRAME
3 BUTTS
ADA THRESHOLD
LEVER HANDLE INTERIOR AND EXTERIOR
LOCK SET W/ NO SEPERTATE DEAD BOLT

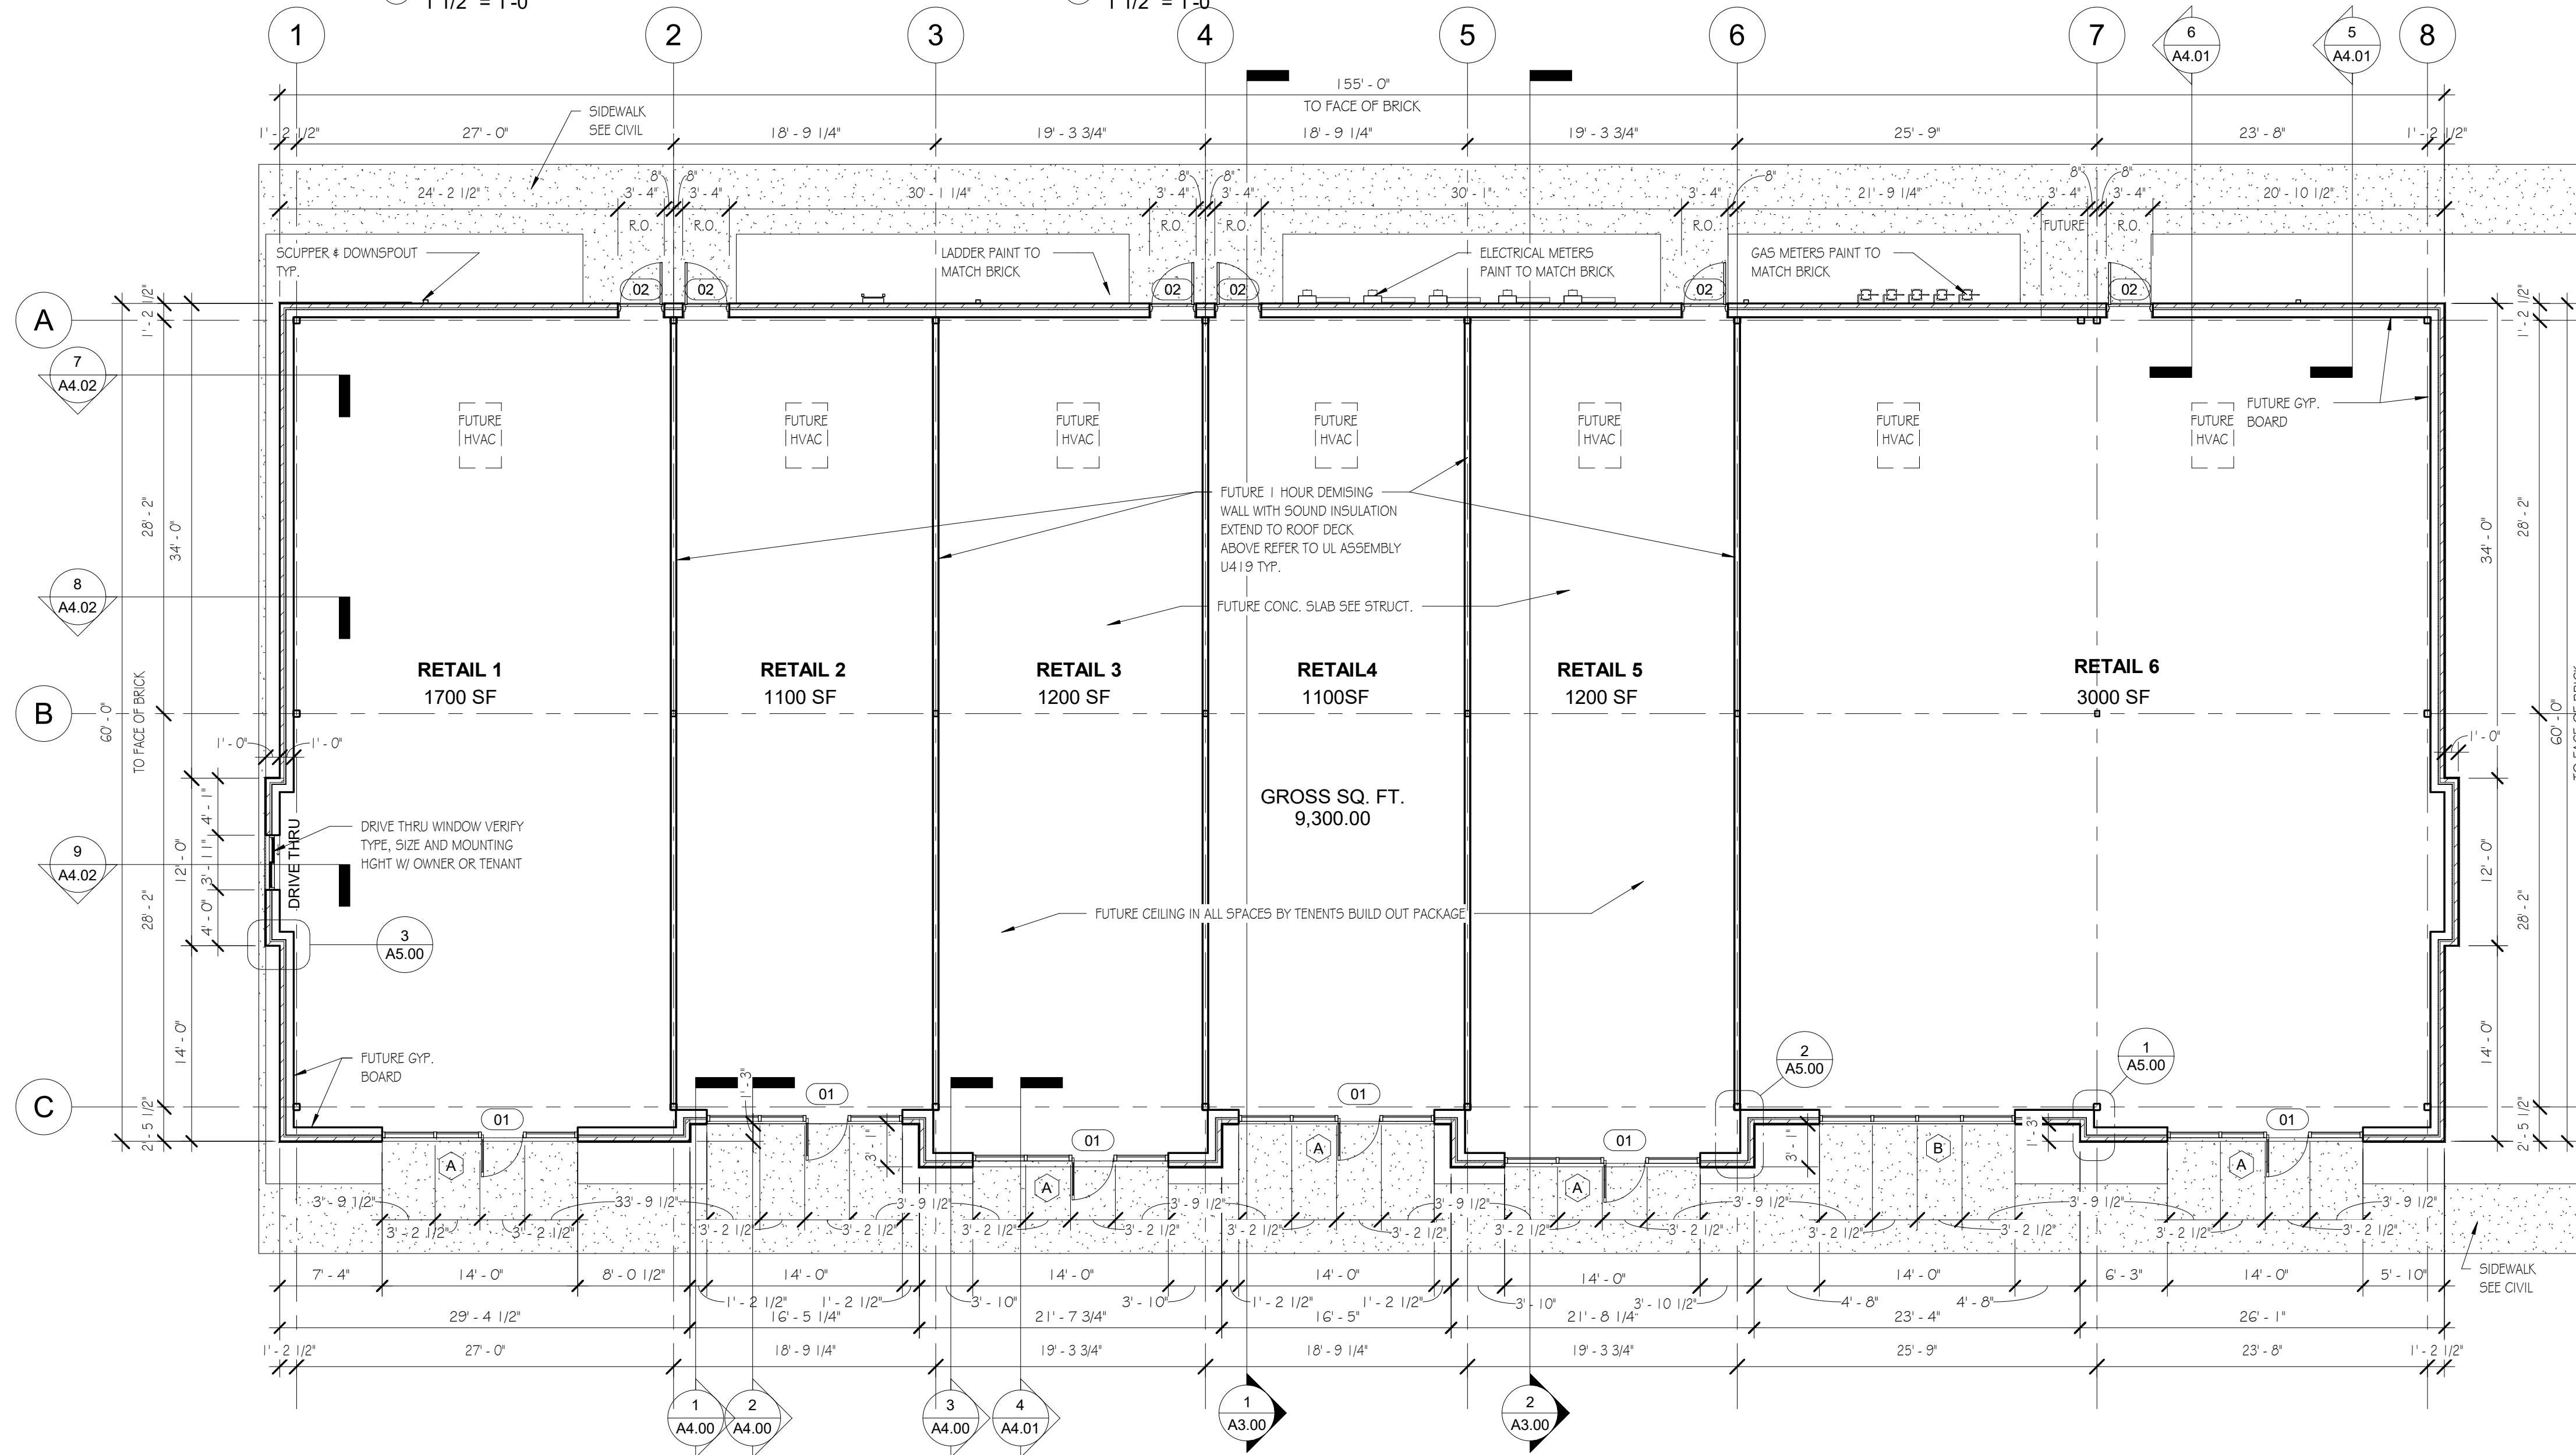

A FLOOR PLANS
1/8" = 1'-0"

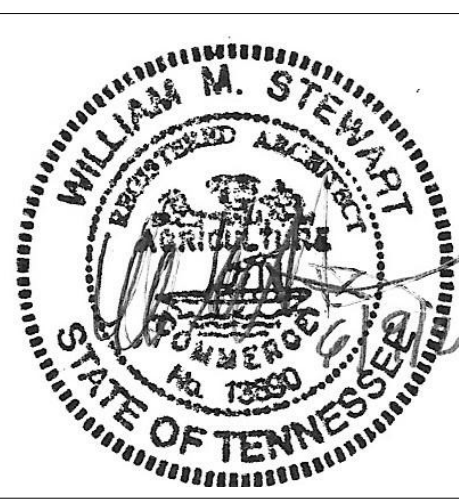

W. Michael Stewart
Architect

540 Grove Isle Cir. 103
Vero Beach, Florida 32962

BROOKHAVEN
PHASE 3 LOT 4
MURFREESBORO, TENNESSEE

06/10/2021

A1.00