


NOTE:
1. HOLD ALL VERTICAL RISERS (MECHANICAL AND/OR ELECTRICAL) AS CLOSE TO COLUMN AS POSSIBLE.
2. DETAIL IS TYPICAL FOR A SINGLE RISER. INCREASE SIZE AS REQUIRED WHERE (2) OR MORE RISERS OCCUR.
3. STEEL PLATE GUARDS SHALL BE PROVIDED AT ALL VERTICAL PIPING AND CONDUITS (MECHANICAL, PLUMBING AND/OR ELECTRICAL) SUBJECT TO DAMAGE. CONTRACTOR SHALL FIELD CHECK ALL LOCATIONS AND DIMENSIONS BEFORE FABRICATION OF STEEL PLATE GUARDS.

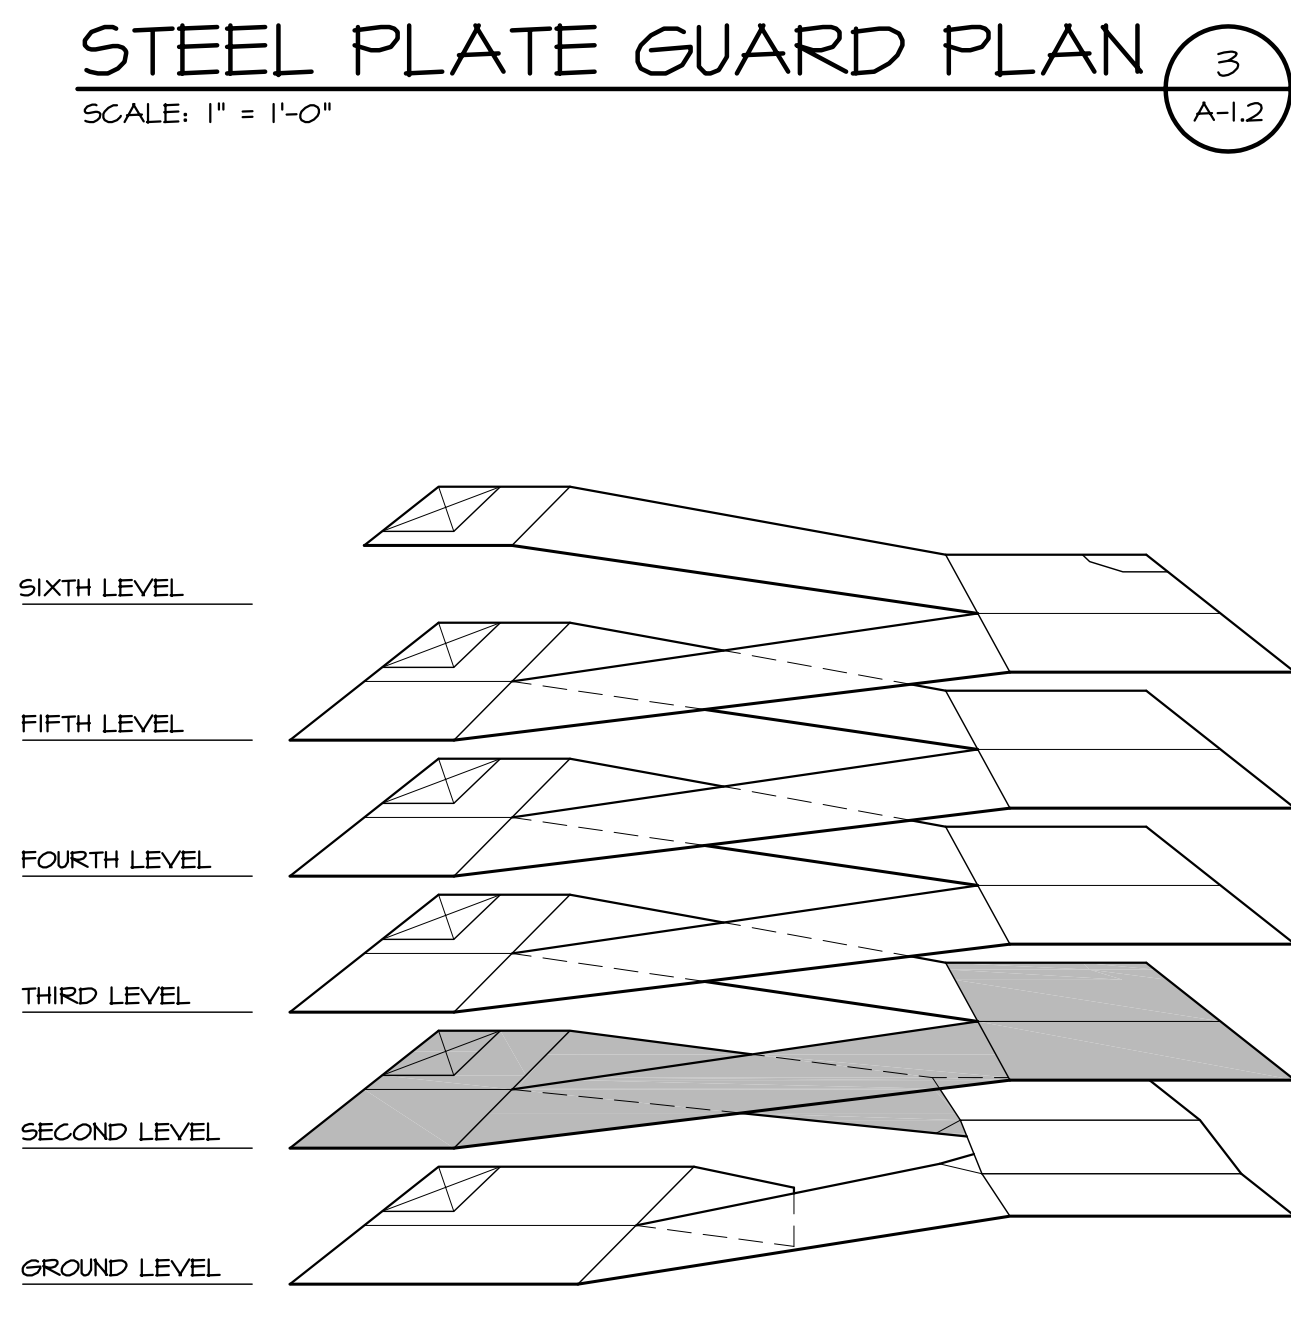

ISOMETRIC
SCALE: NONE

GARDEN THEATER BLOCK PARKING STRUCTURE

DETROIT, MICHIGAN

Parking Consultants Architects - Engineers Planners
26877 Northwestern Hwy., Suite 208
Southfield, Michigan 48033
Tel: 248.353.5080
Fax: 248.353.5830
Lutz, Florida
Tel: 813.949.0860
www.RichAssoc.com

Date	ISSUED FOR:	By
04-24-08	PROGRESS SET	
05-19-08	PRECAST BID SET	
05-30-08	BIDDING	
07-11-08	CONSTRUCTION	
02-20-09	BULLETIN No. 3	

SECOND LEVEL FLOOR PLAN

Drawn By	RTM	Detail Number
Checked By	RJK	Detail Sheet
File Name	0733A-1.2	
Plot Date	02-20-09	

File No	0733	NORTH
Date	07-11-08	
Scale	AS NOTED	
Last Rev.	02-20-09	

Sheet Number: **A - 1.2**

FLOOR PLAN LEGEND:

- C.I.P. CONCRETE FOUR STRIP / TOPPING
- TRAFFIC BEARING WATERPROOFING (T.B.W.P.)

GRADE CONVERSION:
100.00 DRAWING BASE = 142.50 PER "GRIFFELS-WEBSTER" SITE PLAN DATUM

ELECTRICAL / MECHANICAL NOTE:
WHERE EXPOSED VERTICAL ELECTRICAL CONDUIT RINGS ARE TO BE LOCATED TIGHT TO FACE OF ALL WALLS AS INDICATED ON PLANS.
HORIZONTAL ELECTRICAL CONDUIT RINGS ARE TO BE LOCATED TIGHT TO INSIDE OF ALL P.C.G., C.I.P. CONC. AND/OR STEEL FRAMING MEMBERS.
ELECTRICAL CONTRACTOR TO COORDINATE WITH PRECASTER ALL REQUIRED P.C.G. PENETRATIONS FOR CONDUIT RINGS AND ATTACHMENTS.
MECHANICAL/PLUMBING TRADES TO COORDINATE WITH PRECASTER ALL REQUIRED P.C.G. PENETRATIONS AND ANCHORAGE.

CAULKING / SEALANT NOTE:
CONT'S BACKER ROD AND SEALANT (COLOR BY ARCHITECT) AT ALL EXPOSED EXTERIOR JOINTS (HORIZONTAL AND VERTICAL) OF TOWER WALLS.
CONT'S CAULKING (TO BE PAINTED OR STAINED) AT ALL EXPOSED INTERIOR JOINTS (HORIZONTAL AND VERTICAL) OF TOWER WALLS.
CONT'S BACKER ROD AND SEALANT (COLOR BY ARCHITECT) AT ALL EXPOSED EXTERIOR COLUMN, HALL AND SPANDREL PANEL JOINTS (HORIZONTAL AND VERTICAL).
CONT'S BACKER ROD AND SEALANT (COLOR BY ARCHITECT) AT ALL EXPOSED INTERIOR JOINTS OF GARAGE ALONG PERIMETER WALLS (REFER TO SEALANT DETAIL ISOMETRIC).
CONT'S SEALANT (COLOR TO MATCH CONCRETE FLOOR) IN TOOLED JOINTS ALONG TOP AND BOTTOM OF C.I.P. CONC. WASH / POUR STRIPS (REFER TO SEALANT DETAIL ISOMETRIC).
CONT'S BACKER ROD AND SEALANT (COLOR TO MATCH CONCRETE FLOOR) AT ALL DOUBLE TEE TO DOUBLE TEE FLOOR JOINTS (REFER TO SEALANT DETAIL ISOMETRIC).